APP CRS	Rwy ldg	3130
282°	TDZE	128
	Apt Elev	128

RNAV (GPS) RWY 28
PRINCETON (39N)

RNP APCH.

NA Use Trenton Mercer altimeter setting, if not received use Somerset altimeter setting. Procedure NA at night. Rwy 28 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 2700 direct FOLAM and hold.

TTN ASOS	NEWARK APP CON	UNICOM	
126.775	132.8 379.9	122.725 (CTAF)	123.05 L

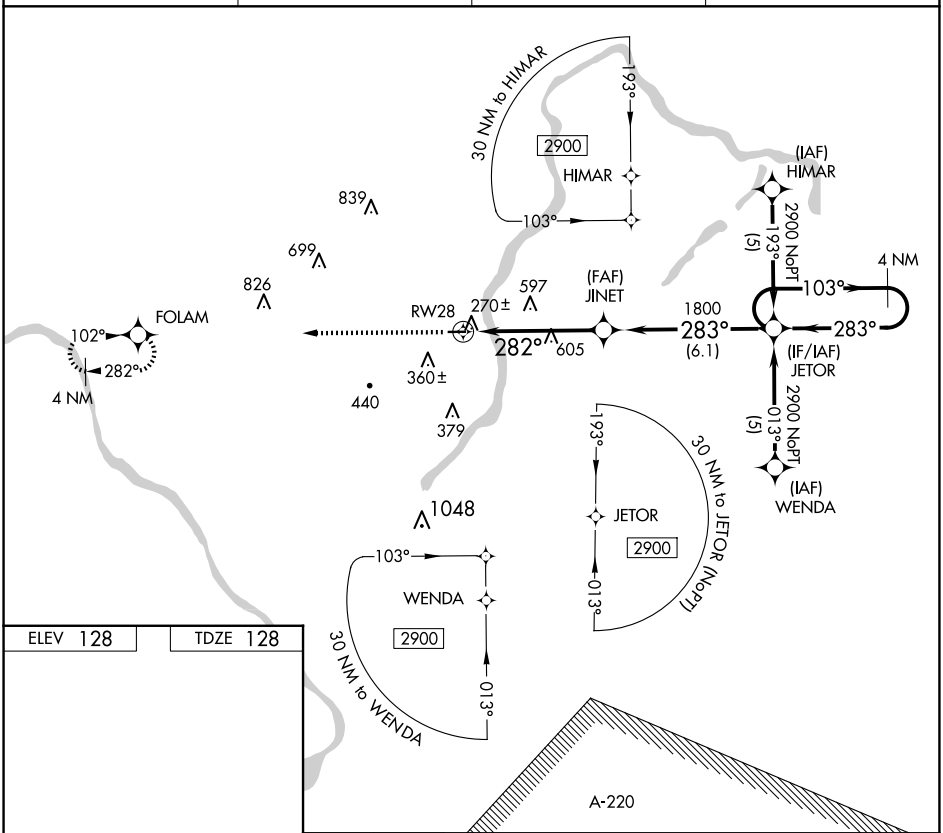

ELEV 128 TDZE 128

MIRL Rwy 10-28 L
REIL Rwy 10 L

2700 FOLAM

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 41).

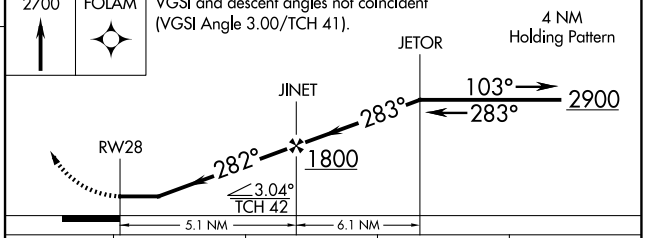

CATEGORY	A	B	C	D
LNAV MDA	900-1 772 (800-1)	900-1¼ 772 (800-1¼)	900-2¼ 772 (800-2¼)	NA

NE-2, 04 SEP 2025 to 02 OCT 2025