

|                                        |                        |                                                                    |
|----------------------------------------|------------------------|--------------------------------------------------------------------|
| WAAS<br>CH <b>93620</b><br><b>W12A</b> | APP CRS<br><b>123°</b> | Rwy Idg<br>TDZE <b>5001</b><br><b>2294</b><br>Apt Elev <b>2296</b> |
|----------------------------------------|------------------------|--------------------------------------------------------------------|

RNAV (GPS) RWY 12


WOKAL FLD/GLASGOW-VALLEY COUNTY (GGW)

RNP APCH

For uncompensated Baro-VNAV systems, LNAV-VNAV NA below -14°C or above 54°C. When local altimeter setting not received, use Wolf Point altimeter setting and increase LPV DA to 2685 feet and visibility all Cats ½ SM; Increase LNAV/VNAV DA to 2728 feet and visibility all Cats ½ SM; increase all MDAs 160 feet and LNAV Cats C/D and Circling Cat D visibility ½ SM, Circling Cat C ¼ SM. Baro-VNAV and VDP NA when using Wolf Point altimeter setting.

MISSED APPROACH: Climb to 6000 direct EZCUP and on track 077° to NEGAE and hold.

|                        |                                         |                                 |
|------------------------|-----------------------------------------|---------------------------------|
| ASOS<br><b>135.175</b> | SALT LAKE CENTER<br><b>126.85 305.2</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|------------------------|-----------------------------------------|---------------------------------|

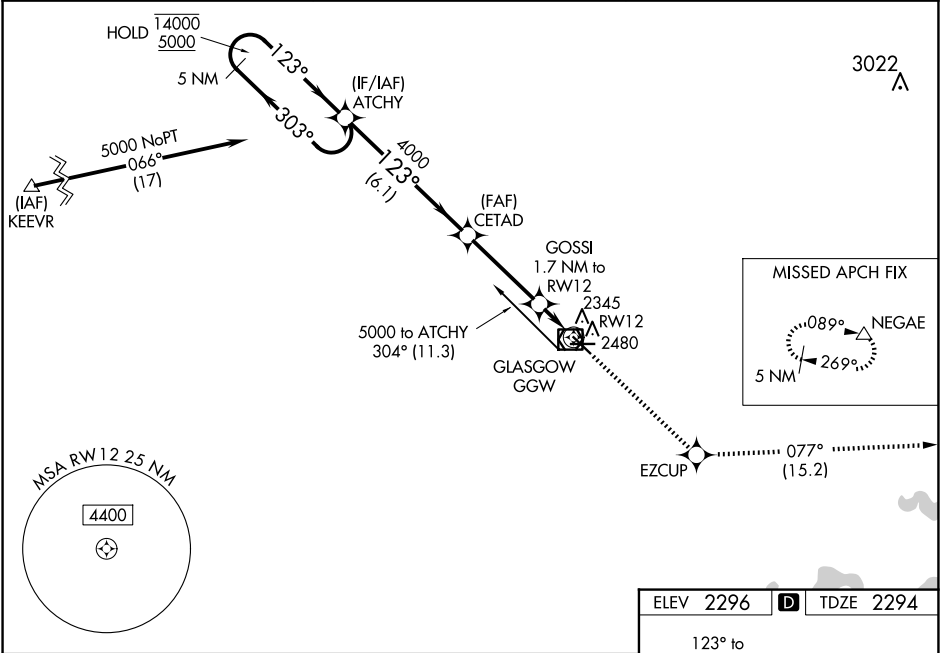

|                             |                        |             |                         |               |                       |                                            |  |                 |  |       |  |
|-----------------------------|------------------------|-------------|-------------------------|---------------|-----------------------|--------------------------------------------|--|-----------------|--|-------|--|
| 5 NM Holding Pattern        |                        | ATCHY       |                         | 6000<br>↑     |                       | EZCUP<br>✦                                 |  | tr<br>077°<br>△ |  | NEGAE |  |
| 14000 ← 303°<br>5000 → 123° |                        | 123°        |                         | CETAD<br>4000 |                       | GOSSI<br>1.7 NM to RW12<br>*0.9 NM to RW12 |  | *LNAV only      |  |       |  |
| GP 3.00°<br>TCH 40          |                        | 4000        |                         | *2860         |                       | RW12                                       |  | RW12            |  |       |  |
|                             |                        | 6.1 NM      |                         | 3.5 NM        |                       | 0.8                                        |  | 0.9             |  |       |  |
| CATEGORY                    | A                      | B           | C                       | D             |                       |                                            |  |                 |  |       |  |
| LPV DA                      | 2544-7/8 250 (300-7/8) |             |                         |               |                       |                                            |  |                 |  |       |  |
| LNAV/<br>VNAV DA            | 2587-1 293 (300-1)     |             |                         |               |                       |                                            |  |                 |  |       |  |
| LNAV MDA                    | 2600-1                 | 306 (400-1) | 2600-7/8                |               | 306 (400-7/8)         |                                            |  |                 |  |       |  |
| CIRCLING                    | 2780-1                 | 484 (500-1) | 2780-1½<br>484 (500-1½) |               | 2900-2<br>604 (700-2) |                                            |  |                 |  |       |  |

