

WAAS CH 99620 W30A	APP CRS 303°	Rwy Idg 5001 TDZE 2294 Apt Elev 2296
--	------------------------	---

RNAV (GPS) RWY 30


WOKAL FLD/GLASGOW-VALLEY COUNTY (GGW)

RNP APCH.


V For uncompensated Baro-VNAV systems, LNAV-VNAV NA below -14°C or above 54°C. When local altimeter setting not received, use Wolf Point altimeter setting and increase LPV DA to 2635 feet and all visibilities $\frac{3}{8}$ SM; increase LNAV/VNAV DA to 2728 feet and all visibilities $\frac{1}{2}$ SM; increase all MDAs 160 feet and LNAV Cats C/D and Circling Cat D visibility $\frac{1}{2}$ SM, Circling Cat C $\frac{1}{4}$ SM. Baro-VNAV and VDP NA when using Wolf Point altimeter setting.

MISSED APPROACH:
Climb to 6500 direct
CETAD and on track
261° to KEEVR and
hold.

ASOS 135.175	SALT LAKE CENTER 126.85 305.2	UNICOM 122.8 (CTAF) ①
------------------------	---	---------------------------------

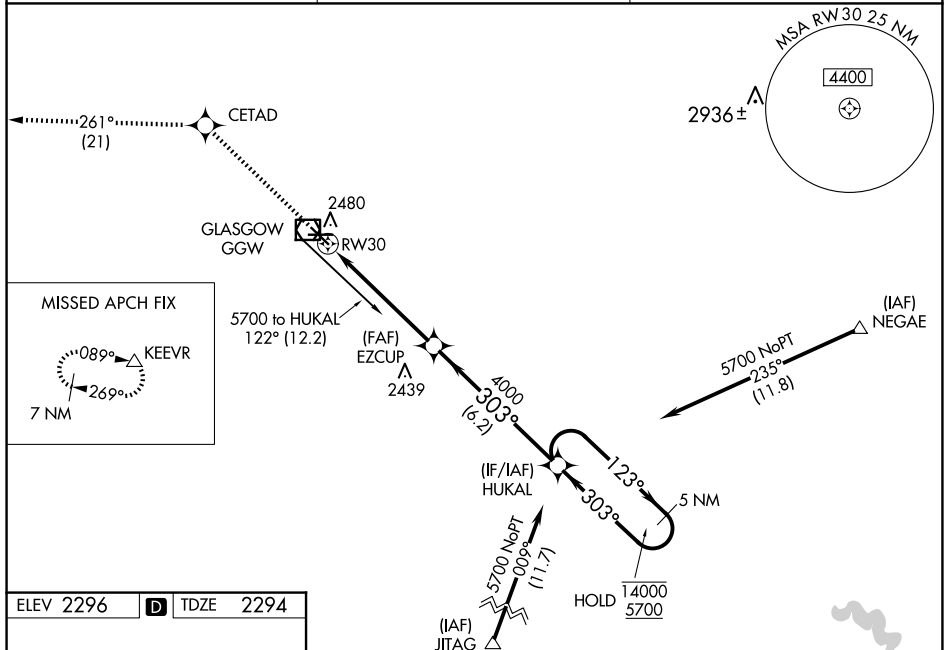

ELEV 2296	D	TDZE 2294
-----------	----------	-----------

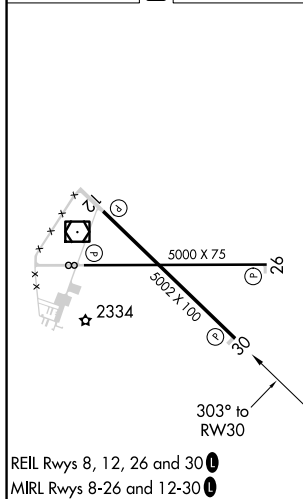

Holding Pattern Diagram:

- Waypoints:** RW30, EZCUP, HUKAL.
- Altitudes:** 6500, 4000, 5 NM Holding Pattern.
- Distances:** 1.2 NM, 4.1 NM, 6.2 NM.
- Angles:** 123°, 303°.
- Navigation Aids:** CETAD, KEEVR, HUKAL.

CATEGORY	A	B	C	D
LPV DA	2494- ³ / ₄	200 (200- ³ / ₄)		
LNAV/VNAV DA	2587-1	293 (300-1)		
LNAV MDA	2700-1	406 (500-1)	2700-1½	406 (500-1½)
CIRCLING	2780-1	484 (500-1)	2780-1½ 484 (500-1½)	2900-2 604 (700-2)