

|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>81914</b><br><b>W26B</b> | APP CRS<br><b>259°</b> | Rwy Ldg <b>7005</b><br>TDZE <b>462</b><br>Apt Elev <b>463</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

## RNAV (GPS) RWY 26L

SPIRIT OF ST LOUIS (SUS)

RNP APCH - GPS.

- ⚠** Baro-VNAV and VDP NA when using St Louis Lambert Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS when using St Louis Lambert Intl altimeter setting, increase LNAV/VNAV all Cats visibility to 1 3/8 SM and LNAV Cat C and D to 1 3/8 SM. When local altimeter setting not received, use St Louis Lambert Intl altimeter setting: increase LPV DA to 705 feet; increase LNAV/VNAV DA to 959 feet and all visibilities to RVR 5000; increase all MDAs 60 feet and LNAV visibility Cat C/D to RVR 5500 and Circling visibility Cat C 1/4 SM.


MALSR



**MISSED APPROACH:**  
Climb to 3000 direct  
JOBK and hold.



\*RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using St Louis Lambert Intl altimeter setting).

|                      |                                         |                                               |                         |                          |                                                           |                         |
|----------------------|-----------------------------------------|-----------------------------------------------|-------------------------|--------------------------|-----------------------------------------------------------|-------------------------|
| ATIS<br><b>134.8</b> | ST. LOUIS APP CON<br><b>126.5 254.3</b> | SPIRIT TOWER★<br><b>124.75 (CTAF) 0 257.2</b> | GND CON<br><b>121.7</b> | CLNC DEL<br><b>133.1</b> | ST. LOUIS CLNC DEL<br><b>121.7</b><br>(when tower closed) | UNICOM<br><b>122.95</b> |
|----------------------|-----------------------------------------|-----------------------------------------------|-------------------------|--------------------------|-----------------------------------------------------------|-------------------------|

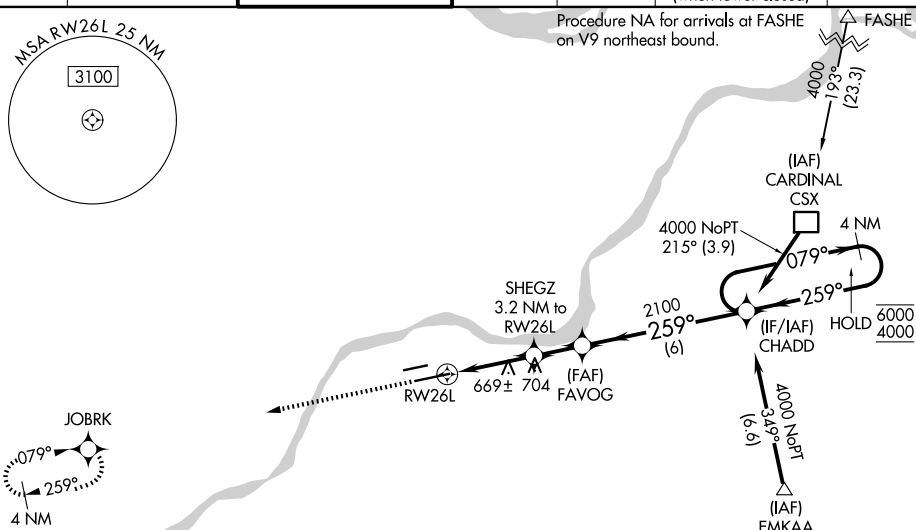

### Procedure NA for arrivals at EMKAA on V88 southwest bound.

|          |          |          |
|----------|----------|----------|
| ELEV 463 | <b>D</b> | TDZE 462 |
|----------|----------|----------|

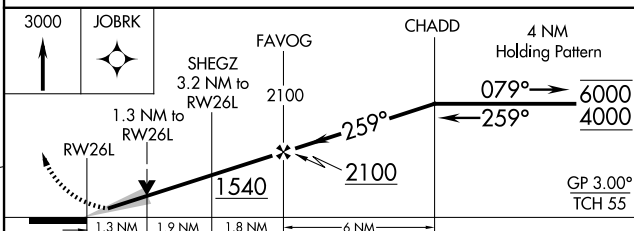

| CATEGORY         | A                     | B                     | C                     | D                     |
|------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| LPV DA*          | 662/24 200 (200-½)    |                       |                       |                       |
| LNAV/<br>VNAV DA | 916/45 454 (500-¾)    |                       |                       |                       |
| LNAV MDA         | 920/24 458 (500-½)    |                       | 920/45 458 (500-¾)    |                       |
| CIRCLING         | 1100-1<br>637 (700-1) | 1140-1<br>677 (700-1) | 1180-2<br>717 (800-2) | 1360-3<br>897 (900-3) |

ST. LOUIS, MISSOURI

Amdt 1A 25JAN24

38°40'N-90°39'W

SPIRIT OF ST LOUIS (SUS)

RNAV (GPS) RWY 26L