

WAAS CH 86627 W30A	APP CRS 302°	Rwy Idg 5500 TDZE 1145 Apt Elev 1145
--	------------------------	---


RNAV (GPS) RWY 30
OWATONNA DEGNER RGNL (OWA)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME/RNP-0.3 NA. When local altimeter setting not received, use Fairbault altimeter setting and increase all DA 41 feet and all MDA 60 feet. Increase LNAV/VNAV all Cats visibility to 1½ mile, increase LNAV Cats C/D visibility to 1 mile, Cat C Circling visibility to 1¾ mile and Cat D visibility to 2½ mile. VDP and Baro-VNAV NA when using Fairbault altimeter setting. For inop MALS, when using Fairbault altimeter setting, increase LNAV/VNAV all Cats visibility to 1½ mile, LNAV Cats C/D visibility to 1¾ mile.


MALS


MISSED APPROACH:
Climb to 2800 direct NOVS and hold.

AWOS-3 128.325	ROCHESTER APP CON ★ 119.8 251.125	UNICOM 122.7 (CTAF) 0
--------------------------	---	---------------------------------

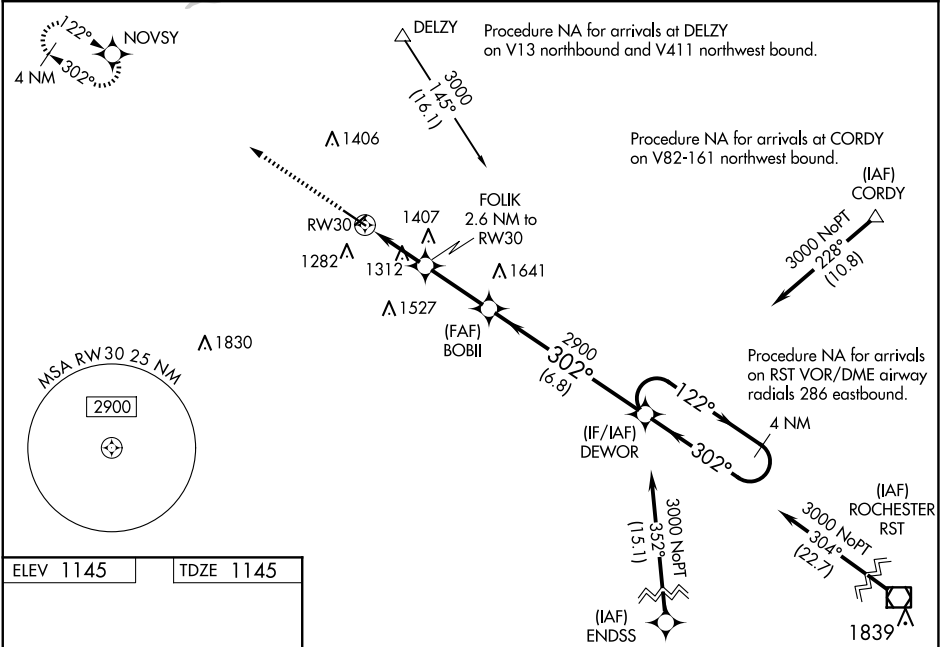

ELEV 1145	TDZE 1145
-----------	-----------

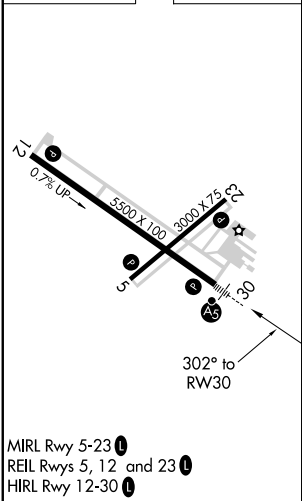

MIRL Rwy 5-23 0
REIL Rwy 5, 12 and 23 0
HIRL Rwy 12-30 0

2800	NOVS	DEWOR	4 NM	Holding Pattern
*LNAV only	FOLIK 2.6 NM to RW30	BOBII 2900	122°	3000
1.2 NM to RW30	2020	2900	302°	GP 3.00° TCH 50
1.2 NM	1.4 NM	2.8 NM	6.8 NM	
CATEGORY	A	B	C	D
LPV DA	1345-1½	200 (200-½)		
LNAV/VNAV DA	1567-1	422 (500-1)		
LNAV MDA	1580-1½	435 (500-½)	1580-¾	435 (500-¾)
CIRCLING	1640-1	1700-1	1720-1½	1880-2¼
	495 (500-1)	555 (600-1)	575 (600-1½)	735 (800-2¼)

NC-1, 04 SEP 2025 to 02 OCT 2025

NC-1, 04 SEP 2025 to 02 OCT 2025