WAAS CH 56528 W23A	APP CRS 230°	Rwy Ldg 3741 TDZE 1041 Apt Elev 1041

RNAV (GPS) RWY 23
MIAMI UNIVERSITY (OXD)

RNP APCH - GPS.

NA

When Circling to Rwy 5 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. Rwy 23 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Covington altimeter setting and increase all MDA 100 feet, increase LP Cat C visibility ⅜ mile, increase LNAV and Circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 3000 direct JOSPU and hold.

AWOS-3PT	CINCINNATI APP CON	UNICOM	
118.625	121.0 254.25	122.8 (CTAF)	122.9 L

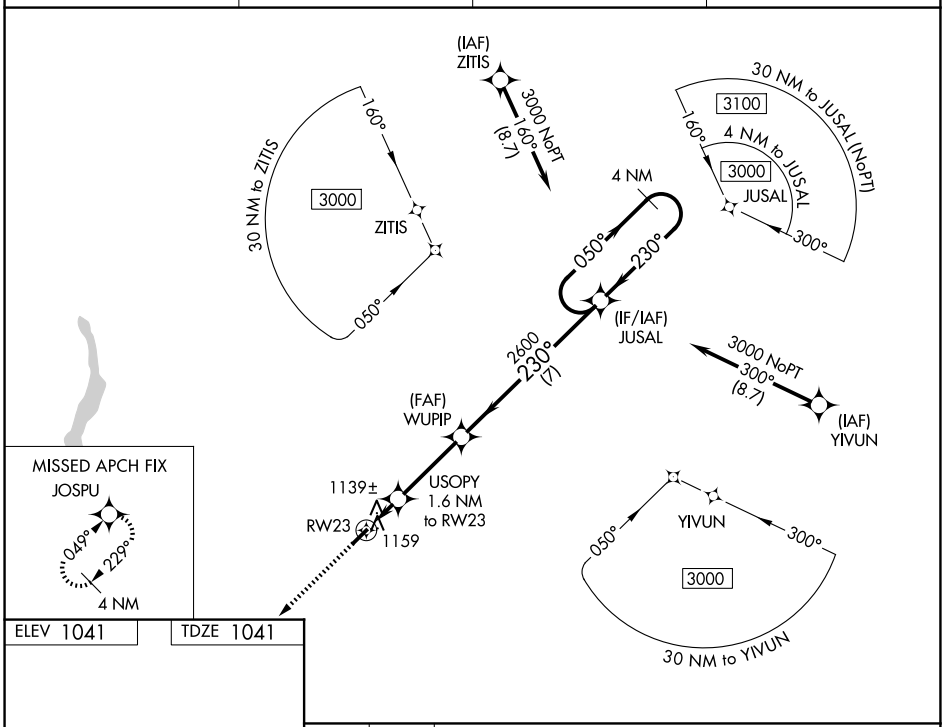

ELEV 1041 TDZE 1041

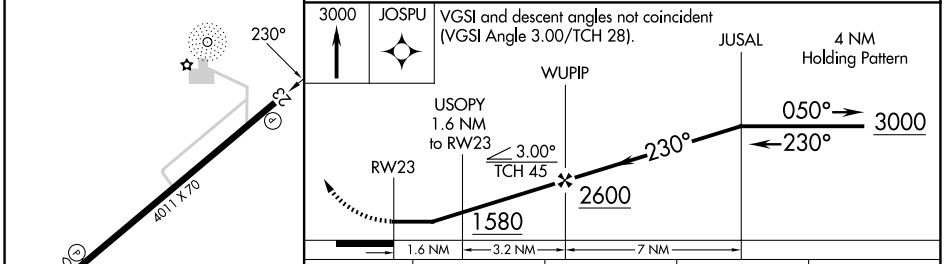

CATEGORY	A	B	C	D
LP MDA	1400-1 359 (400-1)			NA
LNAV MDA	1420-1 379 (400-1)		1420-1⅛ 379 (400-1⅛)	NA
CIRCLING	1460-1 419 (500-1)	1600-1 559 (600-1)	1600-1½ 559 (600-1½)	NA

MIRL Rwy 5-23 L
REIL Rwys 5 and 23 L

EC-2, 04 SEP 2025 to 02 OCT 2025

EC-2, 04 SEP 2025 to 02 OCT 2025