
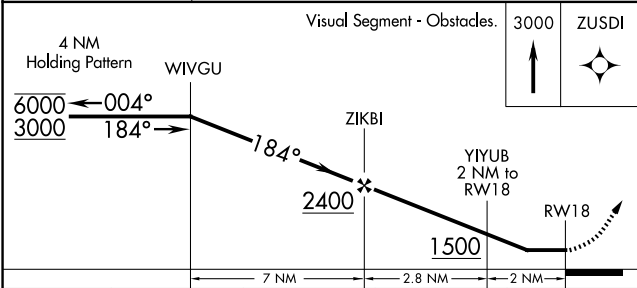


|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>56234</b><br><b>W18A</b> | APP CRS<br><b>184°</b> | Rwy Ldg<br>TDZE <b>835</b><br>Apt Elev <b>835</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 18  
DUPONT/LAPEER (D95)

|                                                                                                                                                                                                                                                                                                            |                                                             |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|
| RNP APCH - GPS.<br>▼ Rwy 18 helicopter visibility reduction below 1 SM NA. Circling NA to Rwys 9 and 27.<br>▲ When local altimeter setting not received, use FNT altimeter setting and increase all MDAs 60 feet and increase LP Cat C visibility 1/8 SM, LNAV Cat C and Circling Cat C visibility 1/4 SM. | MISSED APPROACH:<br>Climb to 3000 direct<br>ZUSDI and hold. |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|

|                          |                                             |                                 |
|--------------------------|---------------------------------------------|---------------------------------|
| AWOS-3P<br><b>134.05</b> | GREAT LAKES APP CON ★<br><b>118.8 257.9</b> | UNICOM<br><b>123.0 (CTAF) 0</b> |
|--------------------------|---------------------------------------------|---------------------------------|

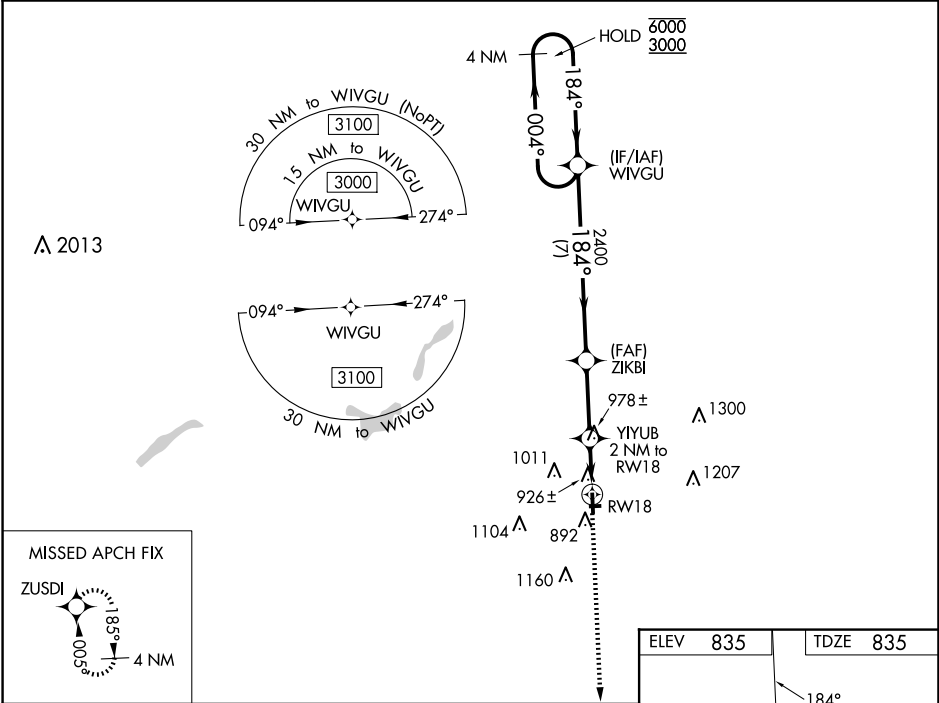

| CATEGORY | A                     | B                     | C                             | D  |
|----------|-----------------------|-----------------------|-------------------------------|----|
| LP MDA   | 1180-1                | 345 (400-1)           |                               | NA |
| LNAV MDA | 1240-1                | 405 (500-1)           | 1240-1 1/8<br>405 (500-1 1/8) | NA |
| CIRCLING | 1300-1<br>465 (500-1) | 1380-1<br>545 (600-1) | 1460-1 3/4<br>625 (700-1 3/4) | NA |

