

LOC/DME I-HEW 110.5 Chan 42	APP CRS 168°	Rwy Idg 6002 TDZE 152 Apt Elev 152
---	------------------------	---



LOC RWY 17R
DAVID WAYNE HOOKS MEML (DWH)

RADAR required for procedure entry.

When local altimeter setting not received, use George Bush Intcnl/Houston altimeter setting and increase all MDA 40 feet; increase S-LOC 17R Cts C/D visibility ½ mile. Circling NA to Rwys 17W and 35W. Rwy 17R helicopter visibility reduction below ¾ SM NA. Circling Rwy 35R NA at night.

MISSED APPROACH: Climb to 1200 then climbing right turn to 2000 on heading 325° and IAH VORTAC R-293 to TNV VOR/DME and hold.

ATIS 128.375	HOUSTON APP CON 119.7 281.4	HOOKS TOWER★ 127.4 354.1 EAST 118.4 (CTAF) 354.1 WEST	GND CON 121.8 239.0	CLNC DEL 119.45	UNICOM 122.95
------------------------	---------------------------------------	---	-------------------------------	---------------------------	-------------------------

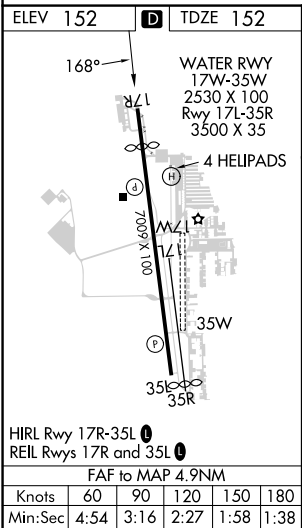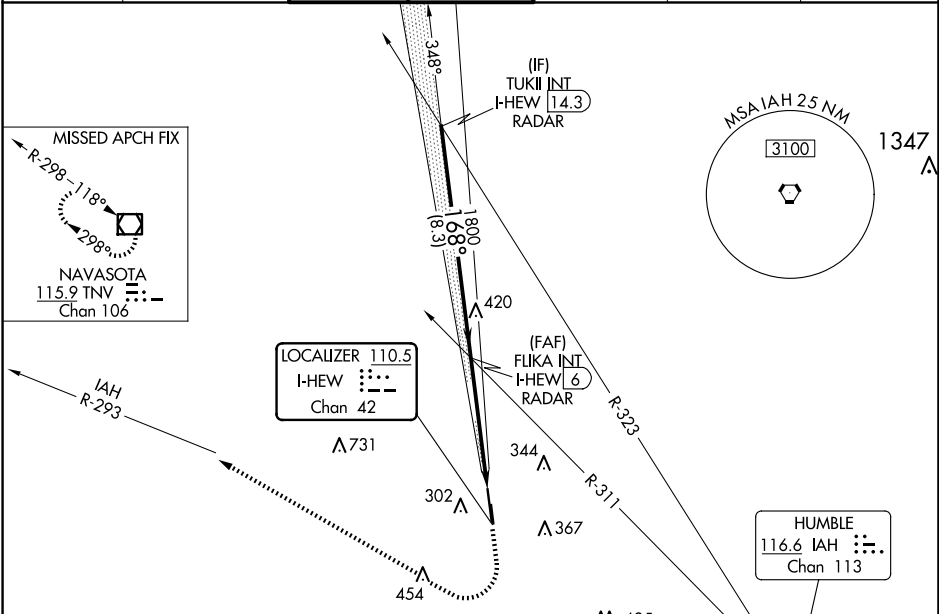

Visual Segment - Obstacles.			
TUKII INT I-HEW 14.3 RADAR	1200	2000	IAH R-293
FLIKA INT I-HEW 6 RADAR	1800	hdg 325°	TNV
8.3 NM		4.9 NM	
CATEGORY	A	B	C D
S-LOC 17R	640-1	488 (500-1)	640-1⅓ 488 (500-1⅓)
CIRCLING	640-1 488 (500-1)	660-1 508 (600-1)	680-1½ 528 (600-1½) 780-2 628 (700-2)

SC-5, 04 SEP 2025 to 02 OCT 2025

SC-5, 04 SEP 2025 to 02 OCT 2025