

VORTAC RMG

115.4

Chan 101

APP CRS

187°

Rwy Idg

TDZE

Apt Elev

N/A

N/A

974

POLK COUNTY/CORNELIUS MOORE FLD (4A4)

VOR-A

Obtain local altimeter setting on CTAF; when not received, use Cartersville altimeter setting and increase all MDAs 80 feet, and visibility Cat C/D ¼ SM, ACPAJ fix minimums visibility Cat C/D ¼ SM.


MISSED APPROACH: Climbing right turn to 3500 direct RMG VORTAC and hold, continue climb in hold to 3500.

ATLANTA CENTER

124.5 270.325

UNICOM

122.8 (CTAF)

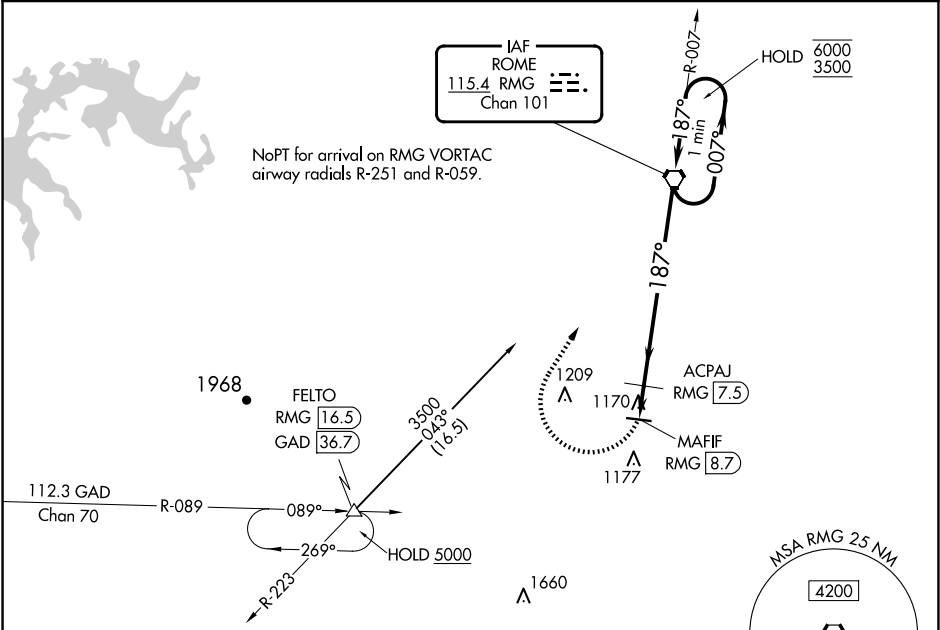

ELEV 974

187°

5060 X 75

0.7% UP

MIRL Rwy 10-28

FAF to MAP 8.7 NM					
Knots	60	90	120	150	180
Min:Sec	8:42	5:48	4:21	3:29	2:54

Procedure NA on V235 westbound without holding at FELTO. ATC clearance required.

3500 RMG

*1740 when using Cartersville altimeter setting.

One Minute Holding Pattern

RMG VORTAC

007° 6000 187° 3500

1660*

MAFIF RMG 8.7

ACPAJ RMG 7.5

1.2 NM 7.5 NM

CATEGORY	A	B	C	D
CIRCLING	1660-1 686 (700-1)	1660-2 686 (700-2)	1660-2½ 686 (700-2½)	1660-2½ 686 (700-2½)

ACPAJ FIX MINIMUMS (DME REQUIRED)

CIRCLING	1520-1 546 (600-1)	1520-1½ 546 (600-1½)	1580-2 606 (700-2)
----------	--------------------	----------------------	--------------------