

FORT BELVOIR, VIRGINIA

ILS or LOC RWY 32

LOC/DME I-DAA 108.9 Chan 26	APCH CRS 322°	Rwy Idg TDZE Arpt Elev 4529 68 74
---	-------------------------	---

[USA]

DAVISON AAF (KDAV)

RADAR required for procedure entry from DCA VOR.

- ▼ * When ALS inop, increase RVR to 45, vis to 7/8 mile.
- ** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1 3/8 miles.
- *** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1 3/8 miles.

MALSF




MISSED APPROACH: Climb to 800, then climbing left turn to 3000 direct to HAXIL (DCA R-181/ 17.4 DME) and hold. Continue climb in hold to 3000.

ATIS 128.175	POTOMAC APP CON 118.95 319.1	TOWER ★ 124.275 (CTAF) 0 229.4	GND CON 121.9 351.8	CLNC DEL 351.8
------------------------	--	---	-------------------------------	--------------------------

† If local altimeter setting not received, use Ronald Reagan Washington National altimeter setting.

Visibility reduction by helicopters not authorized.

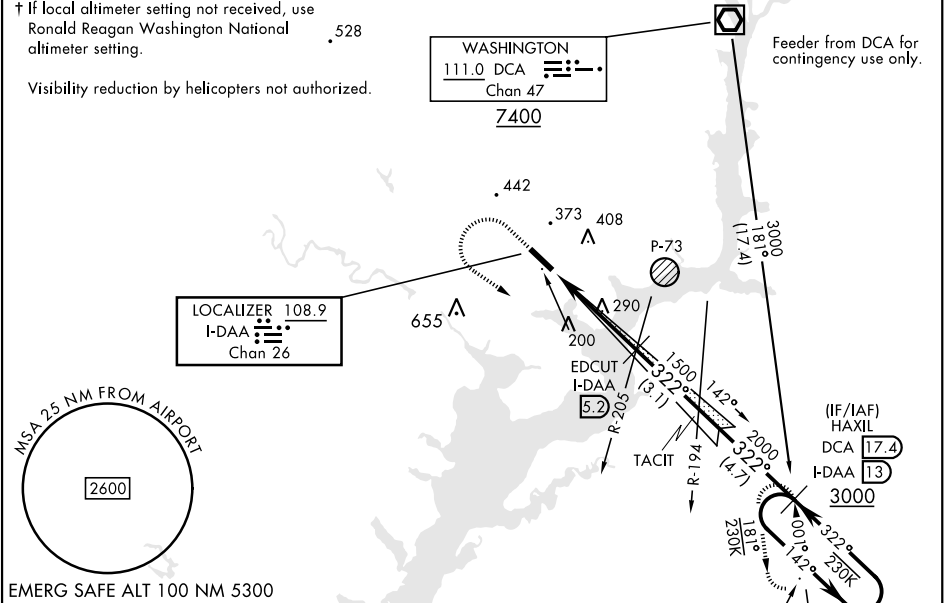

800

↑

3000

↶

HAXIL

I-DAA

13

VDP not authorized with KDCV altimeter.

I-DAA

2.3

EDCUT

I-DAA

5.2

HAXIL

DCA

17.4

I-DAA

13

One Minute Holding Pattern

TACIT

DCA R-194

142°

↗

3000

↖

322°


3000

GS 3.00°

TCH 34

4.4 NM

CATEGORY	A	B	C	D
S-ILS 32*	348/40 280 (300-¾)			
S-LOC 32**	580/40	512 (600-¾)	580-1¼	512 (600-1¼)
CIRCLING	680-1 606 (700-1)	720-1 646 (700-1)	760-2 686 (700-2)	1000-3 926 (1000-3)
† RONALD REAGAN WASHINGTON NATIONAL ALTIMETER SETTING MINIMUMS				
S-ILS 32	388/40 320 (400-¾)			
S-LOC 32***	620/40	552 (600-¾)	620-1⅜	552 (600-1⅜)
CIRCLING	720-1 646 (700-1)	760-1 686 (700-1)	800-2 726 (800-2)	1040-3 966 (1000-3)

ELEV	74	TDZE	68		
Rwy 14 Idg 4930' Rwy 32 Idg 4529'					
					
HIRL Rwy 14-32					
FAF to MAP 4.4 NM					
Knots	60	90	120	150	180
Min:Sec	4:24	2:56	2:12	1:46	1:28

FORT BELVOIR, VIRGINIA

38°43'N-77°11'W

DAVISON AAF (KDAV)

Amtd 1 23JAN25

ILS or LOC RWY 32

NE-3, 04 SEP 2025 to 02 OCT 2025

NE-3, 04 SEP 2025 to 02 OCT 2025