

ATIS 134.55
 CLNC DEL 121.6
 GND CON 121.6
 ANN ARBOR TOWER ★
 120.3 (CTAF)

TAKEOFF MINIMUMS

Rwys 12, 30: NA - Environmental.
Rwys 6, 24: Standard.


NOTE: For use by non-RNAV equipped aircraft only.

NOTE: When using this departure, file the appropriate depicted departure fix and route. Aircraft over HARWL must file FL220 and below. Aircraft land Cleveland (CLE) must file MAARS transition.

Turbojet departures at/above 10000, maintain 280K until advised by ATC. If unable, advise ATC prior to departure.

SPECIAL INSTRUCTIONS:

For appropriate departure control frequency, see graphic.
Use frequency depicted within the sector where first
manaid/fix for your route is located (sectors indicated by
dashed lines; frequencies in dashed box within)

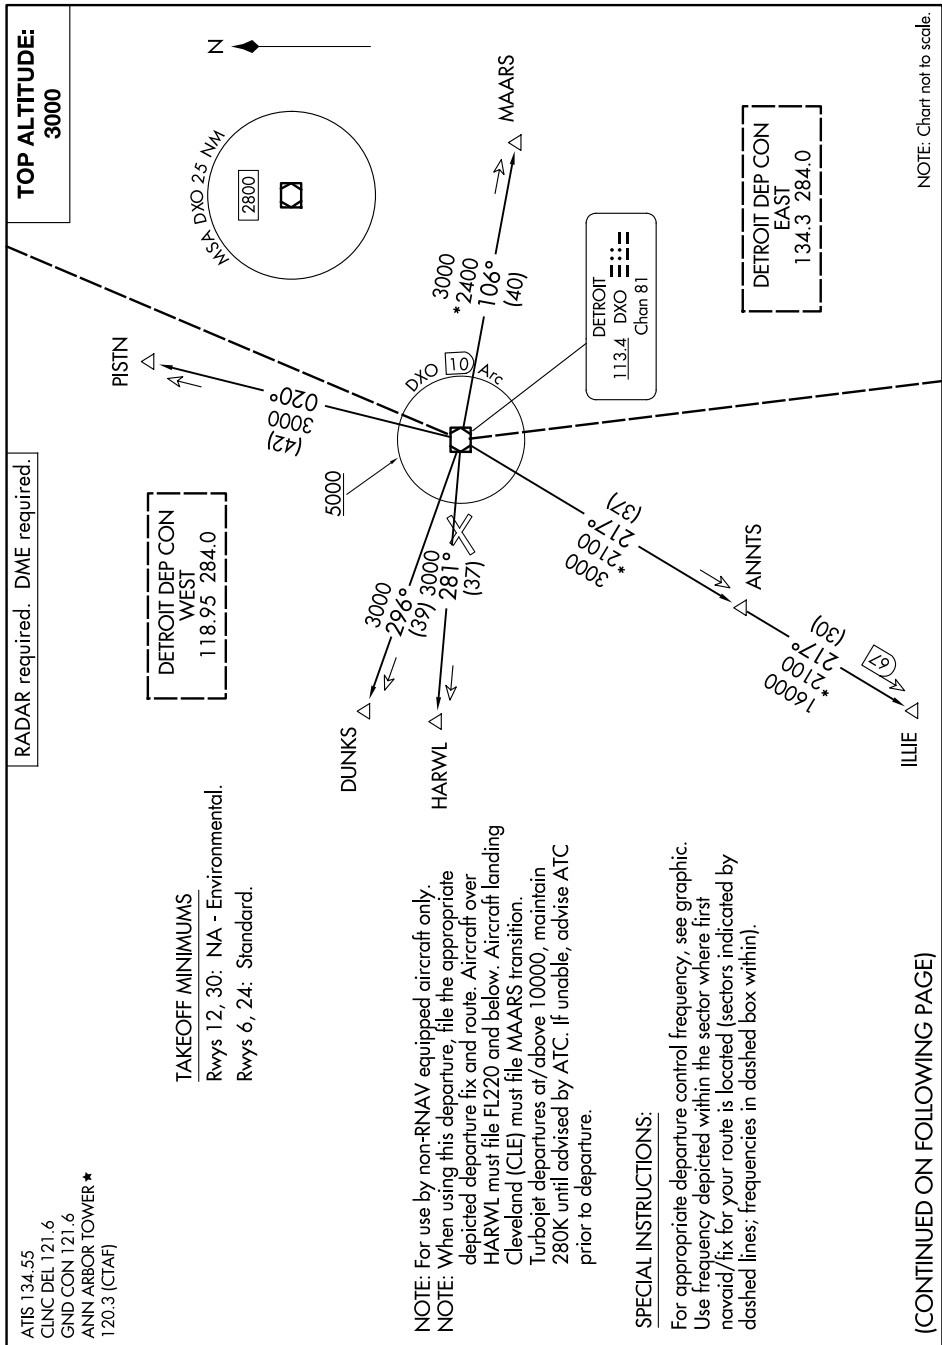

METRO FOUR DEPARTURE

(METRO4.DXO) 05SEP24

ANN ARBOR, MICHIGAN

ANN ARBOR MUNI (ARB)