WAAS CH 78023 W16A	APP CRS 157°	Rwy ldg 5000 TDZE 16 Apt Elev 16

RNAV (GPS) RWY 16

ABBEVILLE CHRIS CRUSTA MEML (IYA)

RNP APCH.

Baro-VNAV NA when using New Iberia altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use New Iberia altimeter setting and increase all DA 27 feet and all MDA 40 feet.

MISSED APPROACH: Climb to 2000 direct GASVE and hold.

AWOS-3PT	LAFAYETTE APP CON ★	GCO	UNICOM
118.875	121.1 268.7	135.075	122.8 (CTAF) L

Procedure NA for arrivals on LFT VORTAC airway radials 252 CW 278.

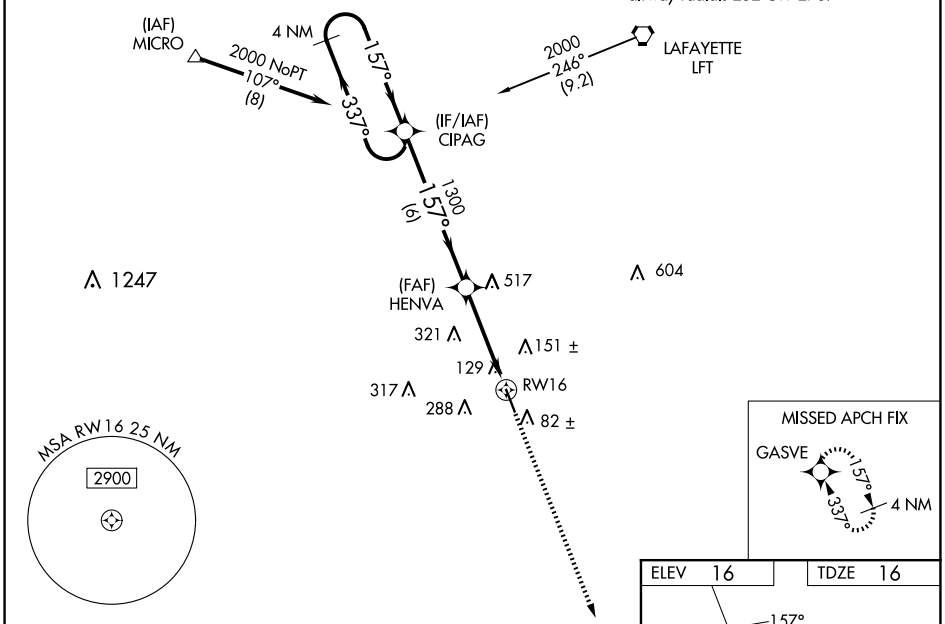

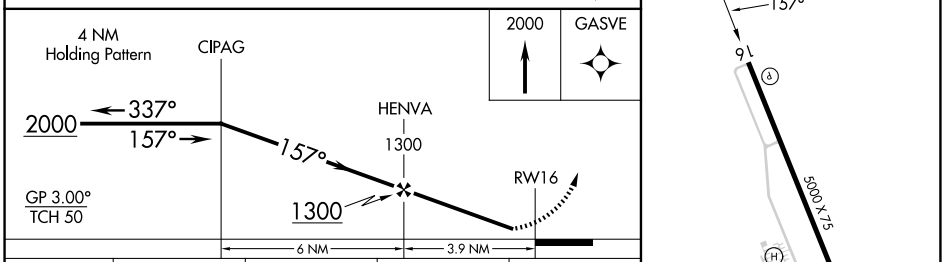

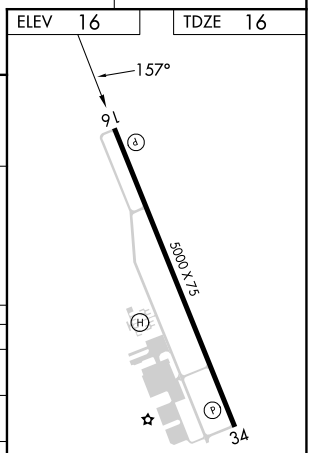

MIRL Rwy 15-33 L
REIL Rwys 15 and 33 L

CATEGORY	A	B	C	D
LPV DA	266-1 250 (300-1)			NA
LNAV/VNAV DA	279-1 263 (300-1)			NA
LNAV MDA	380-1 364 (400-1)			NA
C CIRCLING	520-1 504 (600-1)	600-1 584 (600-1)	700-2 684 (700-2)	NA

SC-4, 04 SEP 2025 to 02 OCT 2025