

WAAS CH 87030 W 13A	APP CRS 135°	Rwy Idg TDZE 1203 Apt Elev 1204
---	------------------------	---

RNAV (GPS) RWY 13


ARTHUR N NEU (CIN)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Audubon altimeter setting. When local altimeter setting not received, use Audubon altimeter setting: increase LPV DA to 1515 feet; increase LNAV/VNAV DA to 1669 feet and all visibilities ¼ SM; increase all MDAs 80 feet and visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 3000 direct COHGI and hold.

AWOS-3 118.025	MINNEAPOLIS CENTER 134.0 288.3	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

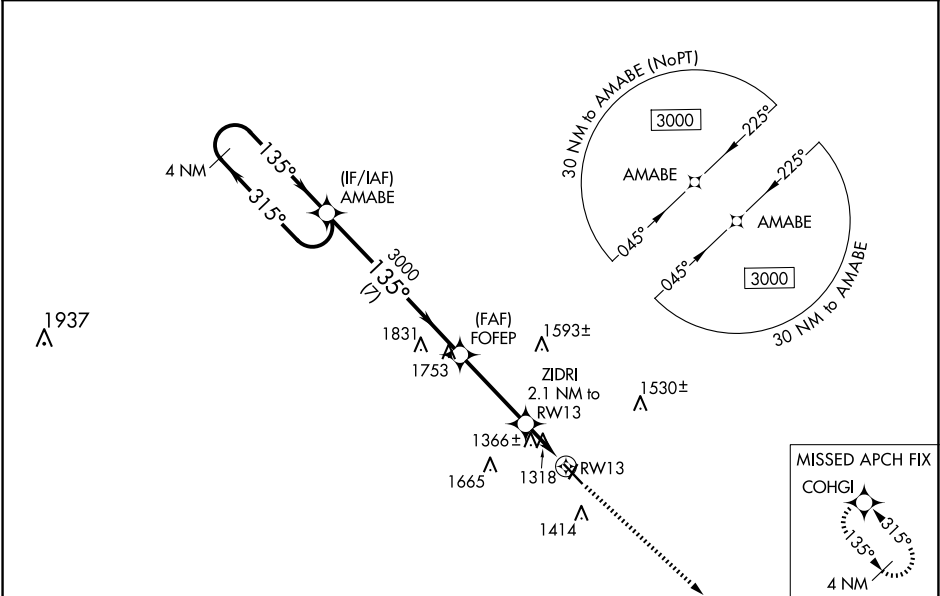

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 26).

4 NM Holding Pattern

GP 3.00° TCH 40

3000

315°

135°

3000

FOFEP

3000

ZIDRI 2.1 NM to RW13

*1900

*1.2 NM to RW13

RW13

7 NM

3.4 NM

0.9

1.2 NM

ELEV 1204

TDZE 1203

COHGI

*LNAV only.

135°

315°

3300 X 100

3506 X 100

CATEGORY	A	B	C	D
LPV DA	1453-1	250 (300-1)		NA
LNAV/VNAV DA	1607-1⅜	404 (500-1⅜)		NA
LNAV MDA	1620-1	417 (500-1)	1620-1⅛ 417 (500-1⅛)	NA
CIRCLING	1740-1	536 (600-1)	1980-2¼ 776 (800-2¼)	NA

MIRL Rwy 13-31 and 3-21 0
REIL Rwy 3, 13, 21 and 31 0