

HI-ILS Z or LOC Z RWY 26

LOC I-PEK 110.3	APCH CRS 257°	Rwy Idg 10,000 TDZE 27 Arpt Elev 30
---------------------------	-------------------------	--

[USAF]

JACKSONVILLE INTL (KJAX)

DME required. RADAR required for procedure entry.


- ▼ * When ALS inop, increase CAT E RVR to 40, vis to ¾ mile.
** When ALS inop, increase vis to 1 ¾ miles.
*** When ALS inop, increase RVR to 55, vis to 1 mile.

MALSRL




MISSED APPROACH: Climb to 1200 then climbing right turn to 4000 on heading 360° and CRG R-316 to HAMOC 23 DME and hold, continue climb-in-hold to 4000.


ATIS 125.85	APP CON 119.0 269.9	TOWER 118.3 317.7	GND CON 121.9 348.6	CLNC DEL 119.5 290.275
-----------------------	-------------------------------	-----------------------------	-------------------------------	----------------------------------

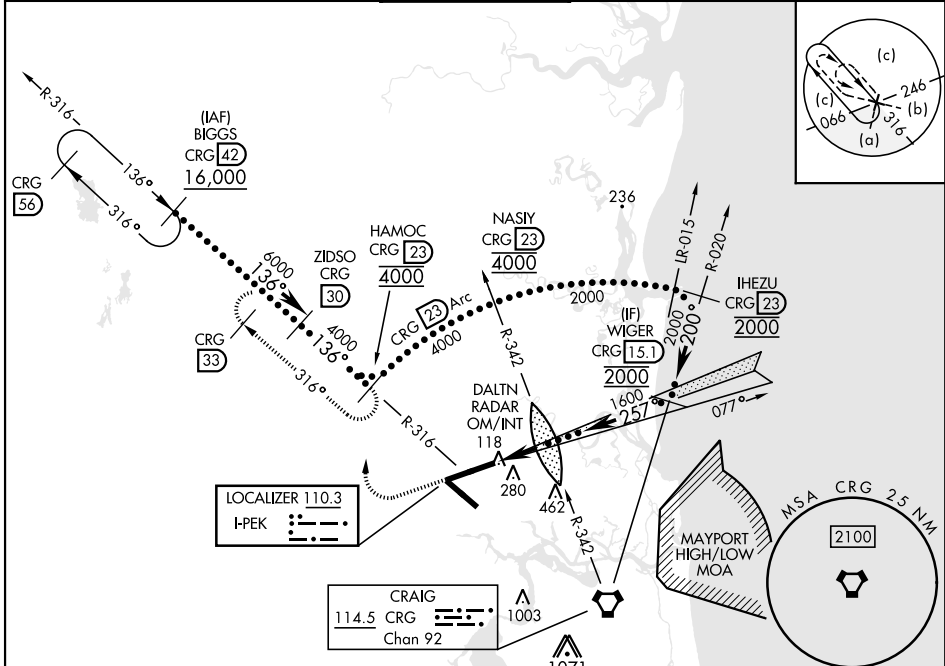

EMERG SAFE ALT 100 NM 2600

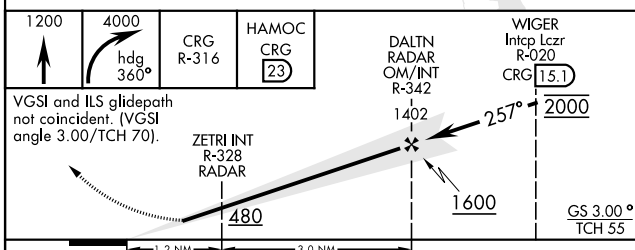

CATEGORY	C	D	E
S-ILS 26*	227/18	200 (200-½)	
S-LOC 26**	480/45	453 (500-7½)	
CIRCLING	580-1½ 550 (600-1½)	580-2 550 (600-2)	760-2½ 730 (800-2½)
ZETRI FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)			
S-LOC 26***	400/35	373 (400-¾)	
CIRCLING	580-1½ 550 (600-1½)	580-2 550 (600-2)	760-2½ 730 (800-2½)

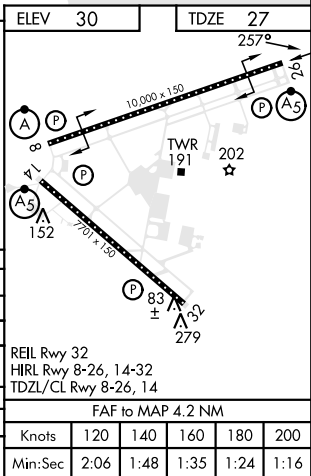

HI-ILS Z or LOC Z RWY 26