


WAAS CH 50526 W08A	APP CRS 076°	Rwy Idg 10000 TDZE 30 Apt Elev 30
--	------------------------	--

RNAV (GPS) Z RWY 8
JACKSONVILLE INTL (JAX)

RNP APCH-GPS.			ALSIF-2	MISSED APPROACH: Climb to 2000 direct YEJWO and hold.	
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C.					
D-ATIS 125.85	JACKSONVILLE APP CON 119.0 269.9	JACKSONVILLE TOWER 118.3 317.7	GND CON 121.9 348.6	CLNC DEL 119.5 290.275	CPDLC

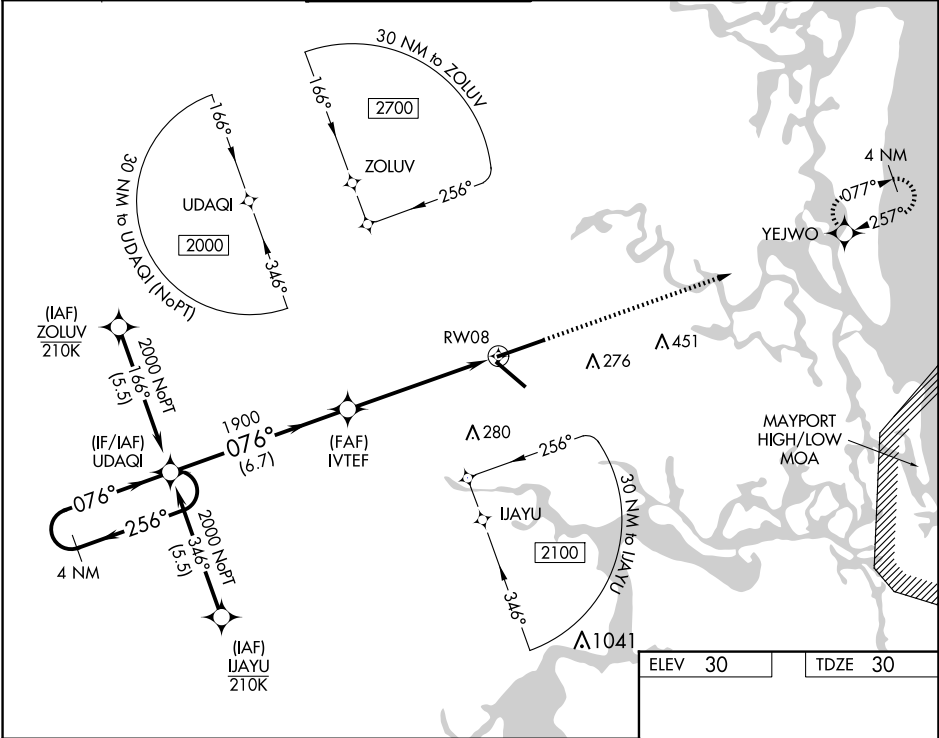

4 NM Holding Pattern		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00°/TCH 70°).		2000	YEJWO
2000		UDAQI		1900	IVTEF
GP 3.00° TCH 51		1900		1.2 NM to RWY 08	RWY 08
		6.7 NM		4.5 NM	1.2 NM
CATEGORY	A	B	C	D	
LPV DA	230/18 200 (200-½)				
LNAV/VNAV DA	364/32 334 (400-¾)				
LNAV MDA	480/24 450 (500-½)		480/45 450 (500-¾)		
CIRCLING	520-1 490 (500-1)		580-1½ 550 (600-1½)		580-2 550 (600-2)

