



WAAS CH 40427 W25A	APP CRS 253°	Rwy Idg TDZE 730 Apt Elev 730	4153
--	------------------------	---	-------------

RNAV (GPS) RWY 25

WILLIAMS COUNTY (ØG6)

▼ Δ NA When VGSI inop, Straight-in/Circling Rwy 25 procedure NA at night. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. Use Defiance Meml altimeter setting; when not received, use De Kalb County altimeter setting; increase all MDAs 60 feet and LP and LNAV and Circling visibility Cats C/D ¼ SM.	MISSED APPROACH: Climb to 3000 direct POKLY and hold.
--	---

DFI ASOS 121.425	TOLEDO APP CON 134.35 307.0	UNICOM 122.8 (CTAF)	123.0
----------------------------	---------------------------------------	-------------------------------	--------------

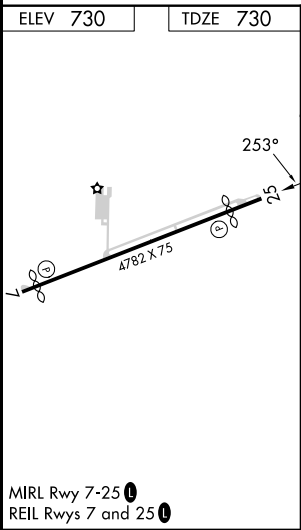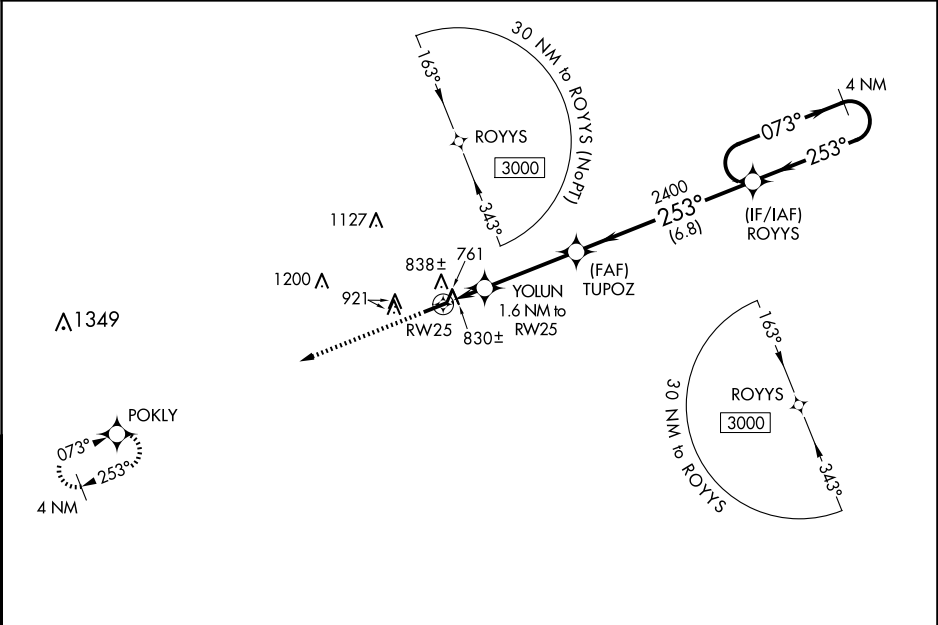

3000 ↑	POKLY ✦	4 NM Holding Pattern							
CATEGORY		A		B		C		D	
LP	MDA	1120-1 390 (400-1)		1120-1½ 390 (400-1½)					
LNAV	MDA	1140-1 410 (500-1)		1140-1½ 410 (500-1½)					
CIRCLING		1300-1 570 (600-1)		1300-1½ 570 (600-1½)		1520-2½ 790 (800-2½)			