



APP CRS	Rwy Ldg	3180
269°	TDZE	9
	Apt Elev	9

RNAV (GPS) RWY 28R

NORTH PERRY (HWO)

RNP APCH. RADAR required for procedure entry.	MISSED APPROACH: Climb to 2000 direct FRRDY and hold.
▼ Rwy 28R helicopter visibility reduction below ¾ SM NA. Straight-in minimums NA at night. Circling Rwy 1R, 10L, 19L, 28R NA at night. Circling NA for Cat C south of Rwy 10R-28L.	

ATIS 135.475	MIAMI APP CON 128.6 306.975	NORTH PERRY TOWER* 132.1 (CTAF) 0 254.3	GND CON 120.45 254.3	UNICOM 122.95
-----------------	--------------------------------	--	-------------------------	------------------

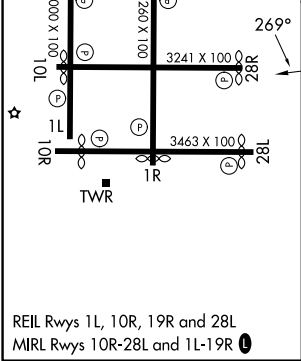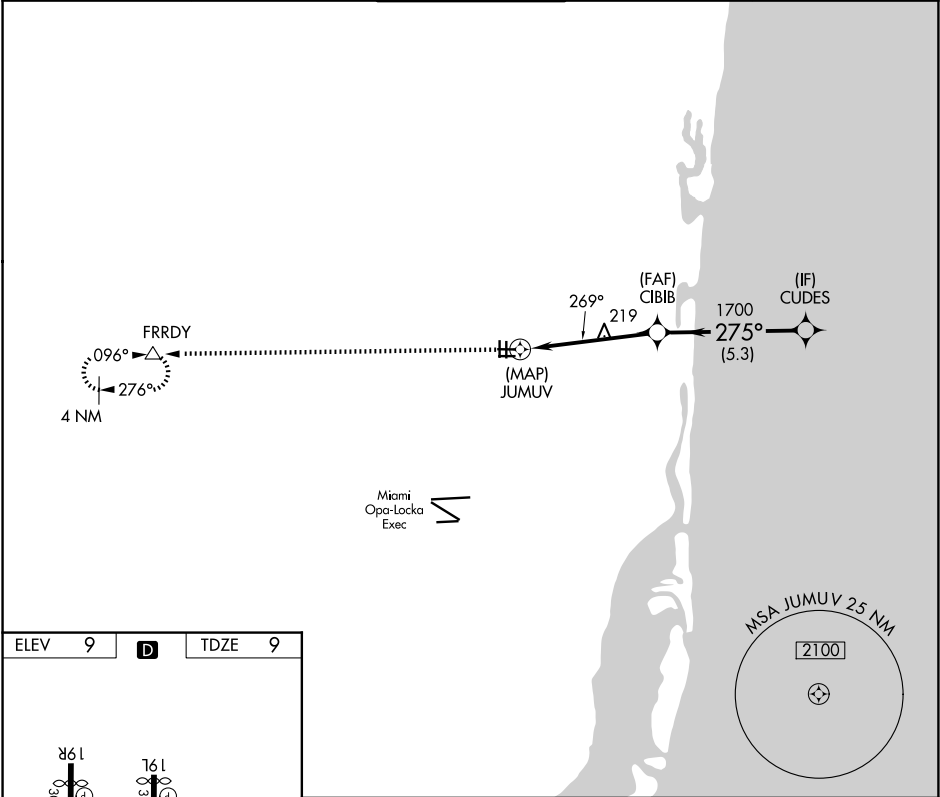

2000 ↑		FRRDY △		VGSI and descent angles not coincident (VGSI Angle 3.50/TCH 39).		CUDES	
		JUMUV		CIBIB		2000	
		269°		275°			
		≤3.00° TCH 43					
0.3		4.9 NM		5.3 NM			
CATEGORY		A		B		C	
LNAV MDA		520-1 511 (600-1)		520-1 3/8 511 (600-1 3/8)		NA	
CIRCLING		560-1 551 (600-1)		560-1 1/2 551 (600-1 1/2)		NA	