

WAAS CH 93733 W06A	APP CRS 063°	Rwy Idg 5835 TDZE 81 Apt Elev 86
--	------------------------	---

RNAV (GPS) RWY 6

OCEAN COUNTY (MJX)

RNP APCH - GPS.

Circling Rwy 14, 32 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Inop table does not apply to LPV. For inop ALS, increase LNAV/VNAV all Cats and LNAV Cats A/B visibility to 1. When local altimeter setting not received, use Mc Guire Fld (Joint Base Mc Guire Dix Lakehurst) altimeter setting and increase all DA 41 feet and all MDA 60 feet; increase LNAV Cats C/D visibility ¼ mile and Circling Cat D visibility ¼ mile. For inop ALS when using Mc Guire Fld (Joint Base Mc Guire Dix Lakehurst) altimeter setting, increase LPV all Cats visibility to 7⁄8, LNAV/VNAV all Cats visibility to 1 1⁄8, LNAV Cats A/B visibility to 1, and LNAV Cats C/D visibility to 1 1⁄8. Rwy 6 helicopter visibility reduction below 3⁄4 SM NA. VDP and Baro-VNAV NA when using Mc Guire Fld (Joint Base Mc Guire Dix Lakehurst) altimeter setting.


MALSR

MISSED APPROACH:

Climb to 600 then climbing right turn to 2000 direct SOITE and hold.

AWOS-3PT 119.875	MC GUIRE APP CON 126.475 363.8	UNICOM 122.7 (CTAF) 0
----------------------------	--	---------------------------------

RADAR REQUIRED

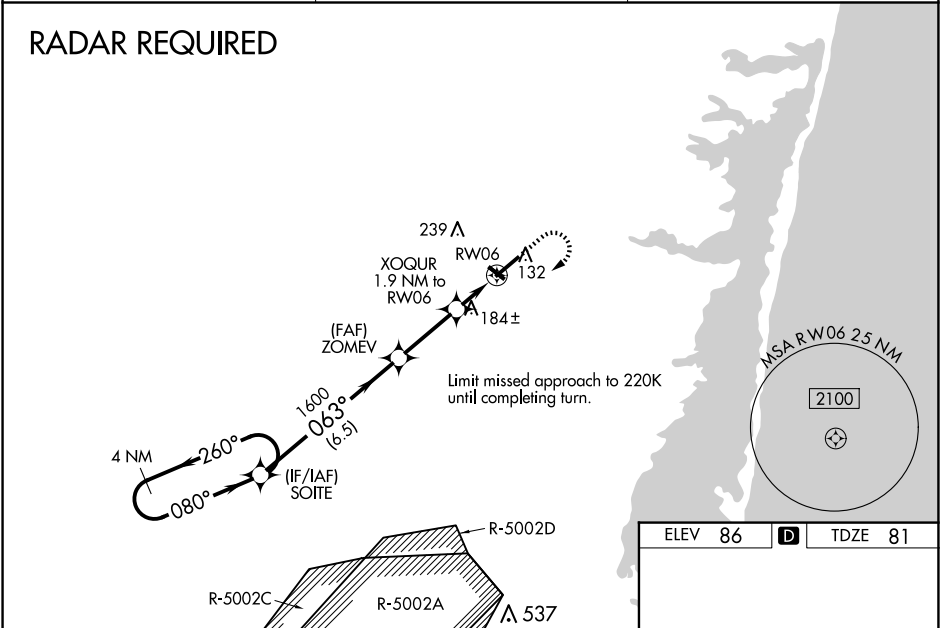

4 NM Holding Pattern		SOITE	ZOMEV	XOQR 1.9 NM to RW06	600	2000	SOITE
2000		260°	080°	063°	1600	720	
GP 3.00° TCH 56							
		6.5 NM	2.7 NM	0.7 NM	1.2 NM		
CATEGORY		A	B	C	D		
LPV DA		331-3⁄4		250 (300-3⁄4)			
LNAV/VNAV DA		405-3⁄4		324 (400-3⁄4)			
LNAV MDA		520-3⁄4		439 (500-3⁄4)			
CIRCLING		540-1	560-1	580-1 1⁄2	700-2		
		454 (500-1)	474 (500-1)	494 (500-1 1⁄2)	614 (700-2)		

