

|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>50309</b><br><b>W22A</b> | APP CRS<br><b>218°</b> | Rwy Idg <b>5420</b><br>TDZE <b>161</b><br>Apt Elev <b>163</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

## RNAV (GPS) RWY 22

MC MINNVILLE MUNI (MMV)

RNP APCH.



**V** Baro-VNAV NA when using Aurora State altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. When local altimeter setting not received, use Aurora State altimeter setting; increase LPV DA to 534 feet, LNAV/VNAV DA to 703 feet; increase all MDAs 60 feet and visibility LNAV Cats C and D ½ SM. For inop ALS, increase LPV all Cats visibility to ¾ SM, LNAV/VNAV all Cats to 1 ½ SM, LNAV Cat A/B to 1 SM and Cat C/D to 1 ½ SM. For inop ALS when using Aurora State altimeter setting, increase LNAV/VNAV all Cats visibility to 1 ½ SM, LNAV Cat A/B to 1 SM and Cat C/D to 1 ½ SM. VDP NA when using Aurora State altimeter setting.

MALSR




**MISSED APPROACH:**  
Climb to 4900 direct  
OVUGE then on 218°  
track to PUCIV and hold,  
continue climb-in-hold  
to 4900.

|                        |                                                |                                              |                           |                                        |
|------------------------|------------------------------------------------|----------------------------------------------|---------------------------|----------------------------------------|
| ASOS<br><b>135.675</b> | PORTLAND APP CON<br><b>126.0 284.6</b> (NORTH) | SEATTLE CENTER<br><b>125.8 291.7</b> (SOUTH) | CLNC DEL<br><b>118.35</b> | UNICOM<br><b>123.0</b> (CTAF) <b>1</b> |
|------------------------|------------------------------------------------|----------------------------------------------|---------------------------|----------------------------------------|

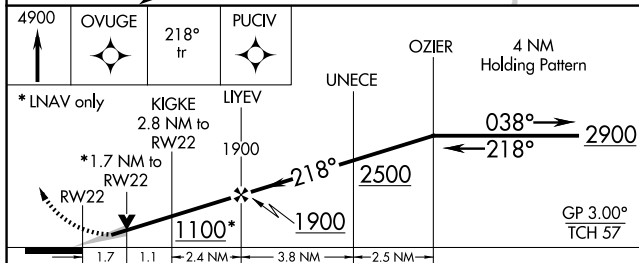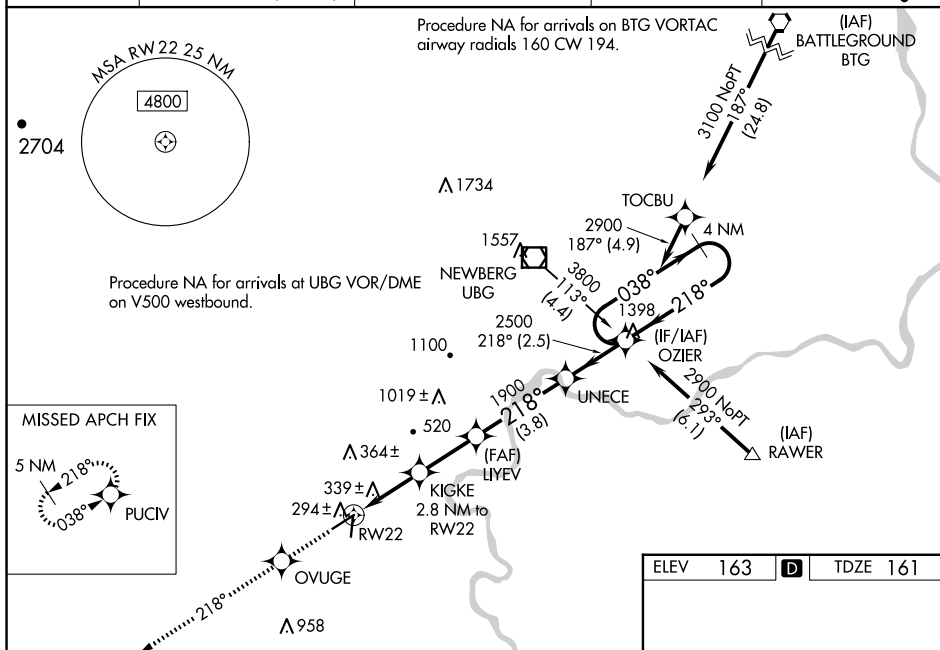

| CATEGORY     | A                         | B | C                         | D |
|--------------|---------------------------|---|---------------------------|---|
| LPV DA       | 474-3/4 313 (400-3/4)     |   |                           |   |
| LNAV/VNAV DA | 643-1 1/4 482 (500-1 1/4) |   |                           |   |
| LNAV MDA     | 740-3/4 579 (600-3/4)     |   | 740-1 1/4 579 (600-1 1/4) |   |

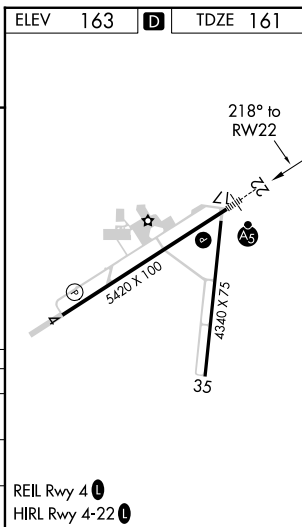

RNAV (GPS) RWY 22