

VOR/DME DTL 111.2 Chan 49	APP CRS 314°	Rwy Idg 5201 TDZE 1372 Apt Elev 1396
---	------------------------	---

VOR RWY 32

DETROIT LAKES/WETHING FLD (DTL)

NA Circling NA to Rwy 18 and 36. VDP NA with Park Rapids altimeter setting. When local altimeter setting not received, use Park Rapids altimeter setting and increase all MDA 100 feet and visibility Cat A ¼ SM, Cats C and D ½ SM and Circling Cats A and C ¼ SM, Cat D ½ SM. DUWUW fix minimums: increase visibility Cats C and D ¼ SM. For Inop ALS, increase S-32 Cats C and D visibility to 2½ SM. Inop table does not apply to S-32 Cats C and D when using Park Rapids altimeter setting.

MALSF



MISSED APPROACH: Climb to 2500 then climbing left turn to 3200 direct DTL VOR/DME and hold, continue climb-in-hold 3200.

AWOS-3PT


119.075

MINNEAPOLIS CENTER

126.1 269.2


UNICOM

122.8 (CTAF)

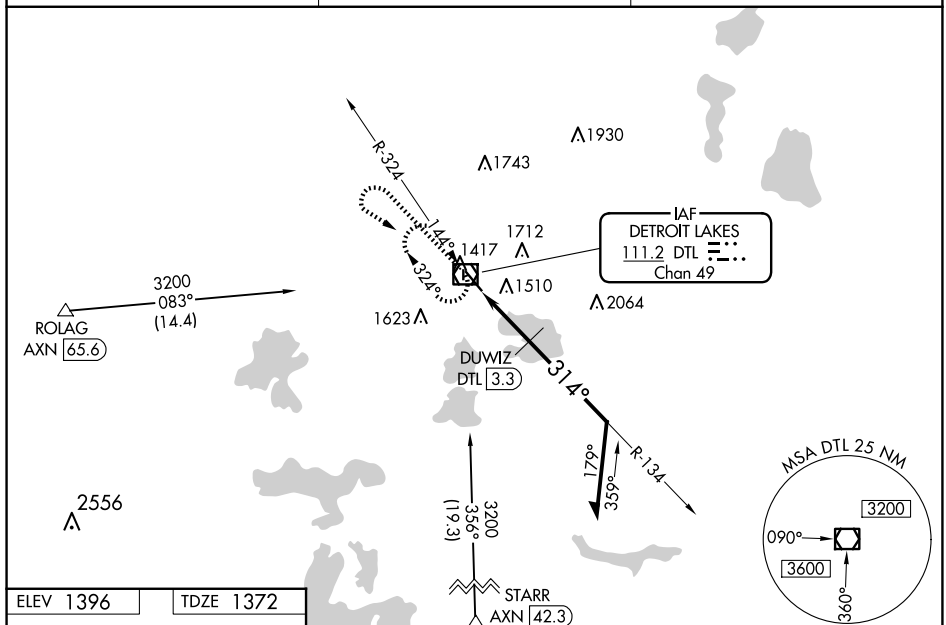

NC-1, 04 SEP 2025 to 02 OCT 2025

ELEV 1396		TDZE 1372
-----------	--	-----------

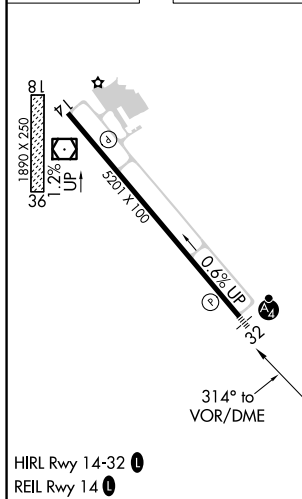

DETROIT LAKES, MINNESOTA

Amdt 2 25FEB21

DETROIT LAKES/WETHING FLD (DTL)

VOR RWY 32

46°50'N-95°53'W

Diagram illustrating the DUWIZ VOR/DME station and associated altitudes:

- DTL (Descent Table Limit):** 2500, 3200, and 3200 (when using Park Rapids altimeter setting).
- DTL VOR/DME:** 1.9 (DTL 1.9), 3.00 (DTL 3.3), and 3.00 (TCH 42).
- Altitudes:** 1734°, 314°, 2200*, and 3200.
- DTL (Descent Table Limit):** 1.9, 3.00, 3.3, 4.2.
- DTL (Descent Table Limit):** 1.9, 3.00, 3.3, 4.2.
- DTL (Descent Table Limit):** 1.9, 3.00, 3.3, 4.2.