

RNP APCH-GPS.

▼


▲

Baro-VNAV and VDP NA when using Tracy Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 36°C. When local altimeter setting not received, use Tracy Muni altimeter setting and increase LPV DA to 1441 feet; LNAV/VNAV DA to 1548 and all Cats visibilities ½ SM; increase all MDA 60 feet, LNAV visibility Cat C/D ½ SM and Circling visibility Cat C/D ¼ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM, and LNAV Cat C/D visibility to 1 SM. For inop ALS when using Tracy Muni altimeter setting, increase LNAV/VNAV all Cats visibility to 1 SM.

MALSR

MISSED APPROACH:
Climb to 3000 direct BOPMY and hold.

AWOS-3PT 120.150	MINNEAPOLIS CENTER 127.1 290.2	GCO 121.725	UNICOM 122.8 (CTAF)
----------------------------	--	-----------------------	-------------------------------

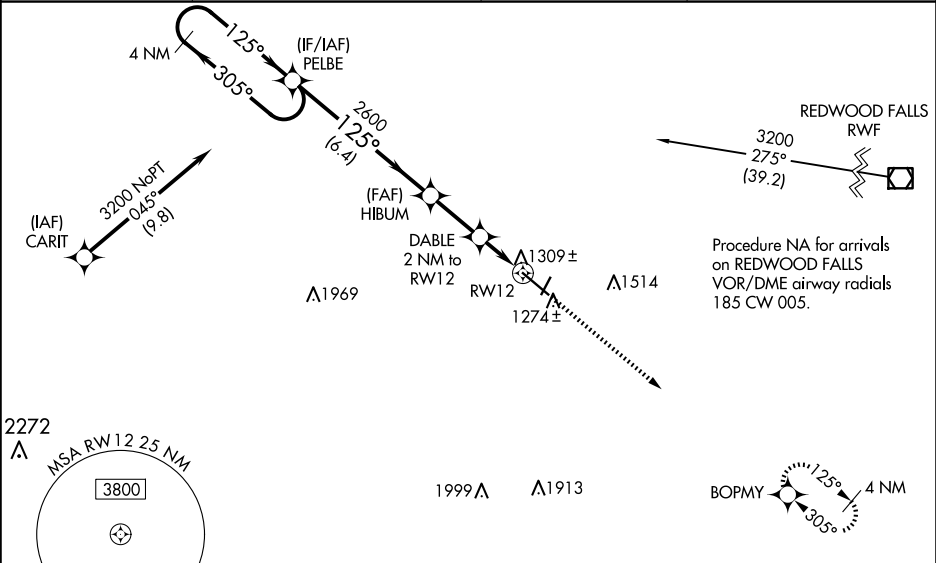

ELEV 1183

TDZE 1183

4 NM Holding Pattern

GP 3.00°
TCH 49

3200

305°

125°

125°

2600

6.4 NM

2.3 NM

1 NM

1 NM

3000

BOPMY

*LNAV only

*1860

125° to RW12

7221 X 100

3999 X 75

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

CATEGORY	A	B	C	D
LPV DA		1383-½	200 (200-½)	
LNAV/VNAV DA		1490-½	307 (400-½)	
LNAV MDA	1560-½	377 (400-½)	1560-⅝	377 (400-⅝)
CIRCLING	1640-1	457 (500-1)	1820-1¾ 637 (700-1¾)	1840-2 657 (700-2)

HIRL Rwy 12-30

REIL Rws 2 and 20

MIRL Rwy 2-20