
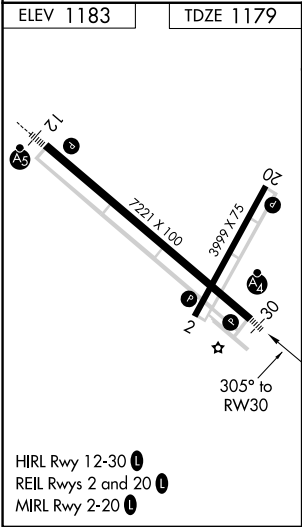


WAAS CH 86321 W30A	APP CRS 305°	Rwy Idg TDZE Apt Elev	7221 1179 1183
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 30
SOUTHWEST MINNESOTA RGNL MARSHALL/RYAN FLD (MML)

RNP APCH - GPS ⚠ Rwy 30 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to LPV all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inop ALS increase LNAV/VNAV all Cats visibility to ¾ SM.		MALSF ⚠	MISSED APPROACH: Climb to 3200 direct PELBE and hold.
AWOS-3PT 120.150	MINNEAPOLIS CENTER 127.1 290.2	GCO 121.725	UNICOM 122.8 (CTAF) 0

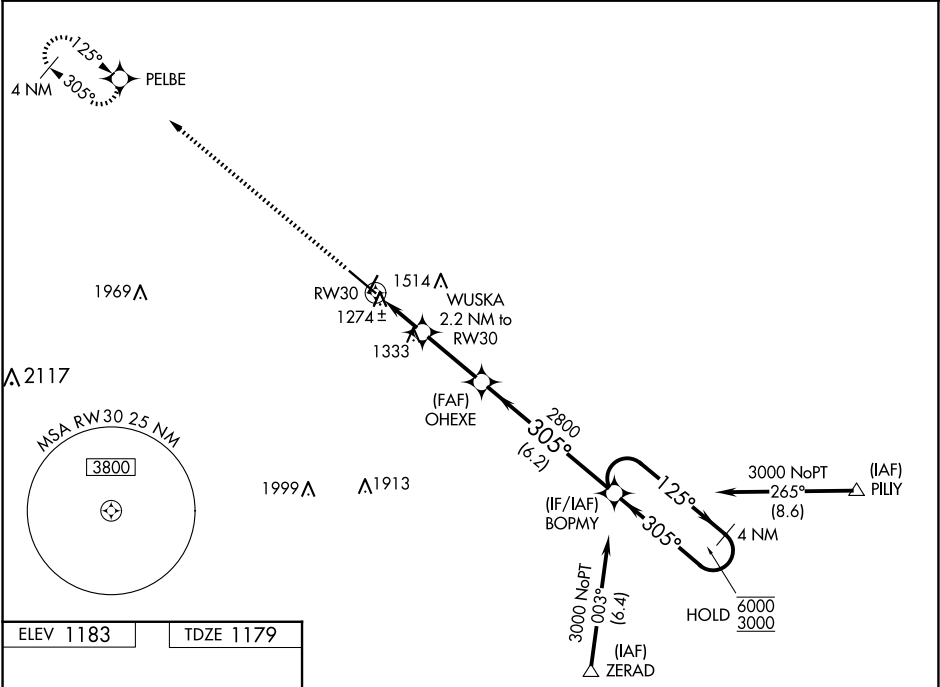

3200	PELBE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 32).			
↑	✧	WUSKA 2.2 NM to RW30	OHEXE 2800	BOPMY 4 NM Holding Pattern	
		1.2 NM to RW30	1900	125° → 6000 ← 305° 3000	GP 3.00° TCH 40
		1.2 NM	1 NM	2.8 NM	6.2 NM
CATEGORY	A	B	C	D	
LPV DA	1429-¾ 250 (300-¾)				
LNAV/VNAV DA	1464-¾ 285 (300-¾)				
LNAV MDA	1600-¾	421 (500-¾)	1600-1	421 (500-1)	
CIRCLING	1640-1	457 (500-1)	1820-1¾ 637 (700-1¾)	1840-2 657 (700-2)	