


|                                        |                        |                             |                                         |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|
| WAAS<br>CH <b>77713</b><br><b>W06A</b> | APP CRS<br><b>061°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>4000</b><br><b>786</b><br><b>786</b> |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|

RNAV (GPS) RWY 6

SENECA COUNTY (16G)

|                       |                                                                                                                                                                                                                                                                                                                                                   |                                |                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|-------------------------------------------------------------|
| RNP APCH.             |                                                                                                                                                                                                                                                                                                                                                   |                                | MISSED APPROACH:<br>Climb to 2400 direct<br>VOBRY and hold. |
| <div>▼<br/>▲ NA</div> | Circling to Rwy 24 NA at night. Baro-VNAV NA when using Findlay altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Findlay altimeter setting and increase all DA/MDA 60 feet, increase LPV all Cots ¼ SM and LNAV and Circling Cat C visibility ¼ SM. |                                |                                                             |
| AWOS-3<br>127.175     | FDY ASOS<br>132.85                                                                                                                                                                                                                                                                                                                                | TOLEDO APP CON<br>120.8 317.55 | UNICOM<br>123.0 (CTAF) 0                                    |

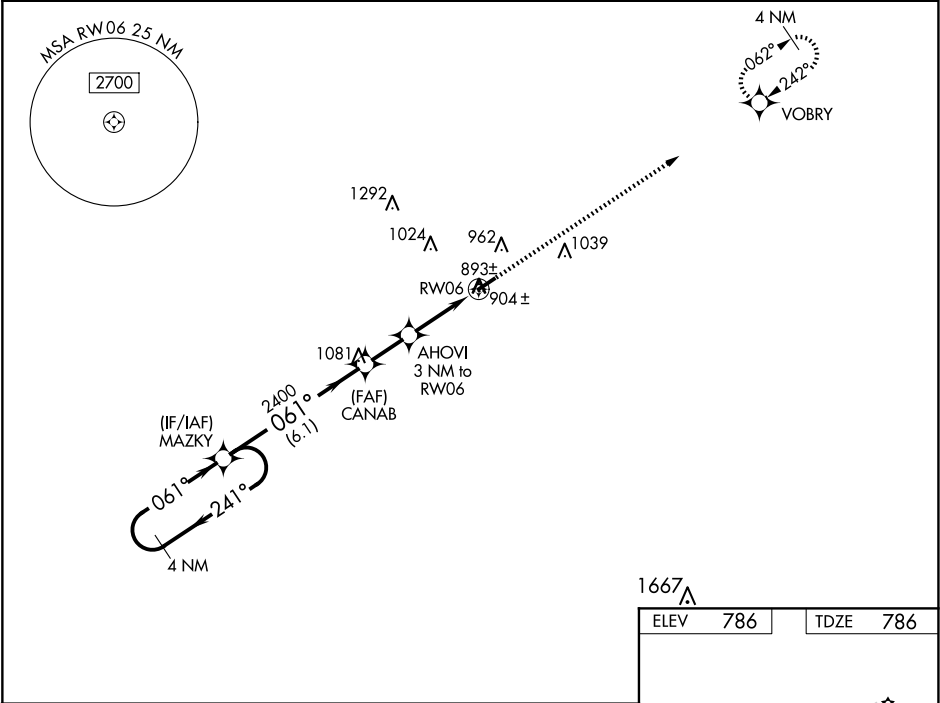

|                            |  |         |              |                         |      |
|----------------------------|--|---------|--------------|-------------------------|------|
| 4 NM Holding Pattern       |  | MAZKY   | CANAB        | AHOVI 3 NM to RW06      | RW06 |
| 2400 ← 241°<br>061° → 2400 |  | 2400    | 2400         | *1780                   |      |
| GP 3.00°<br>TCH 38         |  |         |              |                         |      |
|                            |  | 6.1 NM  | 1.9 NM       | 3 NM                    |      |
| CATEGORY                   |  | A       | B            | C                       | D    |
| LPV DA                     |  | 1137-1¼ | 351 (400-1¼) |                         | NA   |
| LNNAV/VNAV DA              |  | 1174-1½ | 388 (400-1½) |                         | NA   |
| LNNAV MDA                  |  | 1160-1  | 374 (400-1)  |                         | NA   |
| CIRCLING                   |  | 1280-1  | 494 (500-1)  | 1340-1½<br>554 (600-1½) | NA   |

