

WAAS CH 93720 W22A	APP CRS 218°	Rwy Idg 6032 TDZE 529 Apt Elev 529
--	------------------------	---

RNAV (GPS) RWY 22

TALLADEGA MUNI (ASN)


▼

NA

Baro-VNAV NA when using Anniston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Anniston altimeter setting. When local altimeter setting not received, use Anniston altimeter setting and increase LPV DA to 856, LNAV/VNAV DA to 1075, and all MDA 40 feet; increase LPV and LNAV/VNAV all Cats visibility and LNAV Cats C/D visibility ¼ mile. Increase Circling Cat C visibility ¼ SM. Rwy 22 Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 1200 then climbing right turn to 3700 direct JOTAV and hold, continue climb in hold to 3700.

AWOS-3PT 118.425	BIRMINGHAM APP CON 132.15 285.45	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

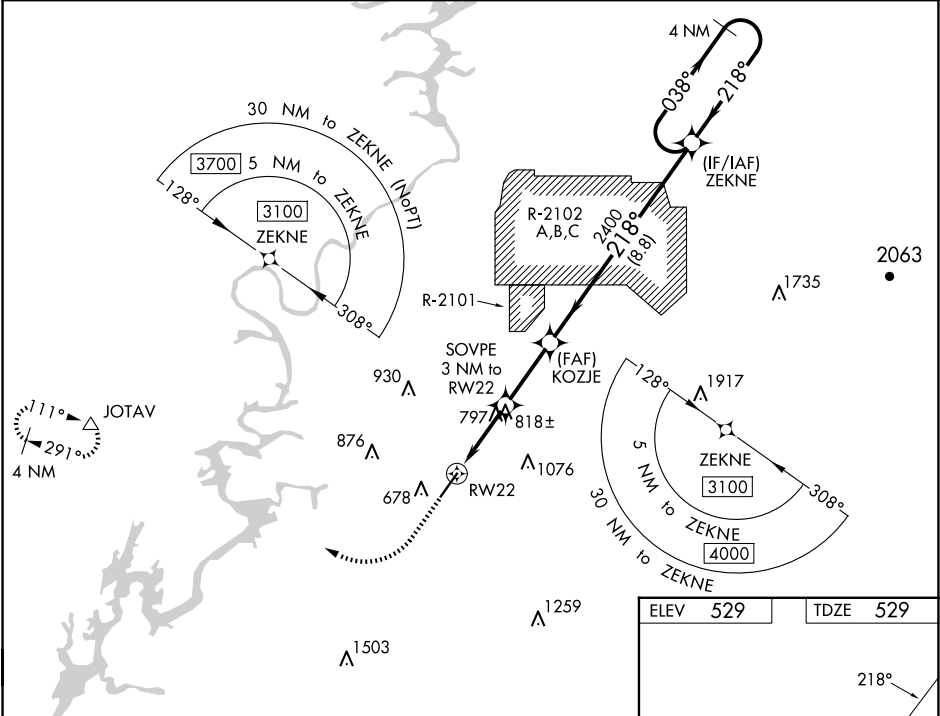

1200	3700	JOTAV
*LNAV only.		
RW22	SOVPE 3 NM to RW22	KOZJE 2400
*1.6 NM to RW22	*1.520	2400
1.6 NM	1.4 NM	2.7 NM
8.8 NM		
CATEGORY	A	B
LPV DA	821-1	292 (300-1)
LNAV/VNAV DA	1040-1¾	511 (600-1¾)
LNAV MDA	1080-1	551 (600-1)
CIRCLING	1140-1	1180-1
	611 (700-1)	651 (700-1)

