

APP CRS
237°

Rwy Ldg
TDZE
Apt Elev

4126
850
851

RNAV (GPS) RWY 23

BLUFFTON (5G7)

RNP APCH.

▼
▲ NA


Use Findlay altimeter setting; when not received use Lima altimeter setting and increase all MDA 20 feet and Circling Cat D visibility ¼ SM.

MISSED APPROACH: Climbing right turn to 2500 direct FBC VORTAC and hold.

FDY ASOS
132.85

TOLEDO APP CON
120.8 317.55

UNICOM
122.8 (CTAF) 0

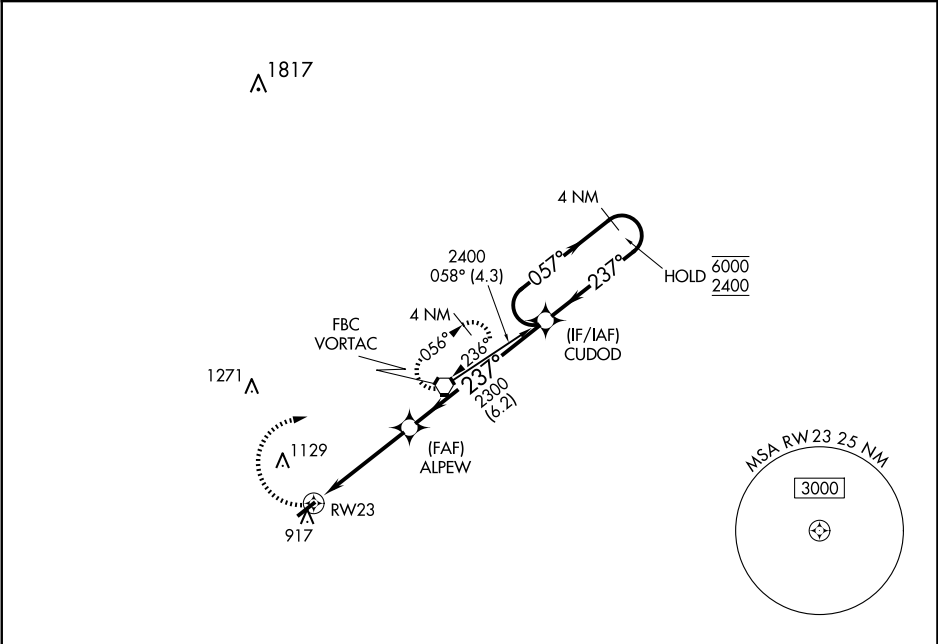

ELEV 851

TDZE 850

REIL Rwy 5 and 23 0

MIRL Rwy 5-23 0

CATEGORY	A		B		C		D	
	1340-1		490 (500-1)		1340-1 3/8		1340-1 1/2	
LNVA MDA	1340-1		490 (500-1)		490 (500-1 3/8)		490 (500-1 1/2)	
CIRCLING	1360-1		1520-1		1520-1 3/4		1520-2	
	509 (600-1)		669 (700-1)		669 (700-1 3/4)		669 (700-2)	