

|                                        |                        |                                                     |
|----------------------------------------|------------------------|-----------------------------------------------------|
| WAAS<br>CH <b>82345</b><br><b>W33A</b> | APP CRS<br><b>335°</b> | Rwy Ldg<br>TDZE <b>1393</b><br>Apt Elev <b>1403</b> |
|----------------------------------------|------------------------|-----------------------------------------------------|

RNAV (GPS) RWY 33


SULLIVAN COUNTY INTL (MSV)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using New York Stewart Intl altimeter setting. When local altimeter setting not received, use New York Stewart Intl altimeter setting: increase LPV DA to 1848 feet and all visibilities ¾ SM; increase LNAV/VNAV DA to 1861 feet and all visibilities ¾ SM; increase all MDAs 220 feet and LNAV visibility Cat C and D ¾ SM, and Circling visibility Cat C ¾ SM and Cat D ½ SM.

MISSED APPROACH:  
Climb to 4000 direct JIBOT and hold.

|                            |                                         |                          |                                 |
|----------------------------|-----------------------------------------|--------------------------|---------------------------------|
| AWOS-3PT<br><b>124.725</b> | NEW YORK APP CON<br><b>132.75 363.1</b> | CLNC DEL<br><b>121.6</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|----------------------------|-----------------------------------------|--------------------------|---------------------------------|

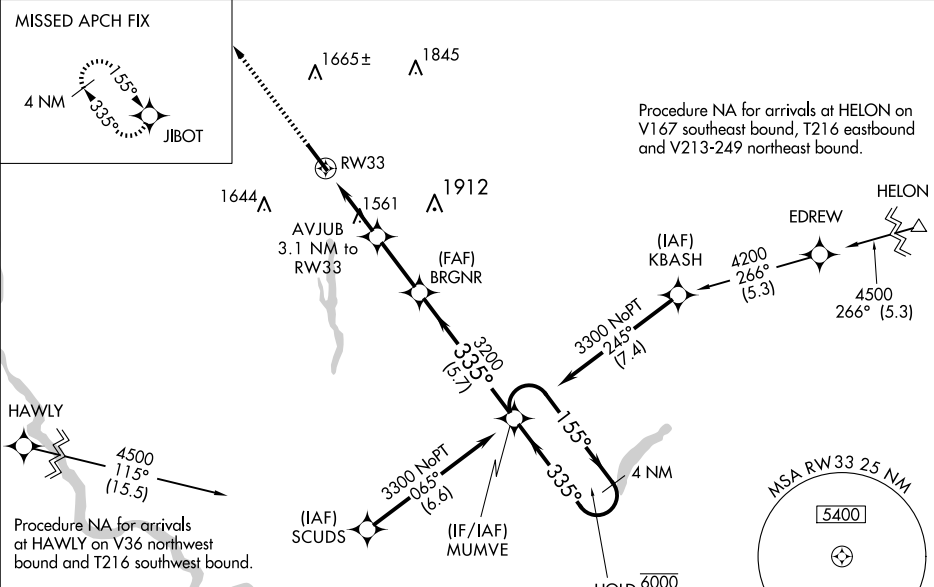

|           |          |           |
|-----------|----------|-----------|
| ELEV 1403 | <b>D</b> | TDZE 1393 |
|-----------|----------|-----------|

