

LOC/DME I-SVH	APP CRS	Rwy Idg	6453
111.75	285°	TDZE	967
Chan 54 (Y)		Apt Elev	968

ILS Y or LOC Y RWY 28

STATESVILLE RGNL (SVH)

DME required.


▼

When local altimeter setting not received, use Lincolnton altimeter setting and increase ILS DA to 1219 and all MDA 60 feet; increase S-LOC 28 Cats C/D visibility ¾ mile and Circling Cat C visibility ¼ mile. VDP NA when using Lincolnton altimeter setting. For inop MALSRR when using Lincolnton altimeter setting, increase S-ILS 28 all Cats visibility to ¾ mile and S-LOC 28 Cats C/D visibility to 1 mile.

MALSRR

MISSED APPROACH: Climb to 1700 then climbing left turn to 3400 on heading 105° and on CLT VOR/DME R-025 to PEGTE INT/I-SVH 13.2 DME and hold.

AWOS-3 119.225	ATLANTA CENTER 125.15 263.0	UNICOM 123.075 (CTAF) 0
-------------------	--------------------------------	----------------------------

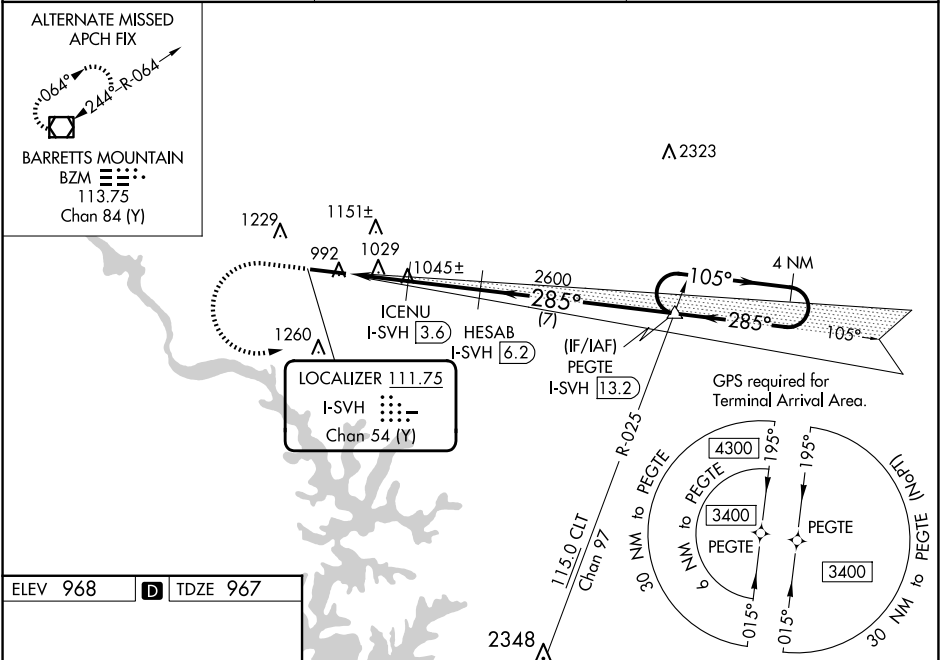

CATEGORY	A	B	C	D
S-ILS 28	1167-½ 200 (200-½)			
S-LOC 28	1280-½ 313 (400-½)			
CIRCLING	1420-1 452 (500-1)	1540-1 572 (600-1)	1540-1½ 572 (600-1½)	1560-2 592 (600-2)

REIL Rwy 10 0
HIRL Rwy 10-28 0

GS 3.00°
TCH 50