

LOC/DME I-SVH  
**111.75**  
Chan **54 (Y)**

APP CRS  
**285°**

Rwy Idg  
TDZE **967**  
Apt Elev **968**

ILS Z or LOC Z RWY 28

STATESVILLE RGNL (SVH)


DME required.

When local altimeter setting not received, use Lincolnton altimeter setting and increase ILS DA to 1219 and all MDA 60 feet; increase S-LOC 28 Cats C/D visibility ⅓ mile and Circling Cat C visibility ¼ mile. VDP NA when using Lincolnton altimeter setting. For inop MALSR when using Lincolnton altimeter setting, increase S-ILS 28 all Cats visibility to ⅔ mile and S-LOC 28 Cats C/D visibility to 1 mile.

MALSR

MISSED APPROACH: Climb to 1700 then climbing left turn to 3400 on heading 105° and CLT VOR/DME R-025 to PEGTE INT/I-SVH 13.2 DME and hold.

|                          |                                       |                                   |
|--------------------------|---------------------------------------|-----------------------------------|
| AWOS-3<br><b>119.225</b> | ATLANTA CENTER<br><b>125.15 263.0</b> | UNICOM<br><b>123.075 (CTAF) 0</b> |
|--------------------------|---------------------------------------|-----------------------------------|

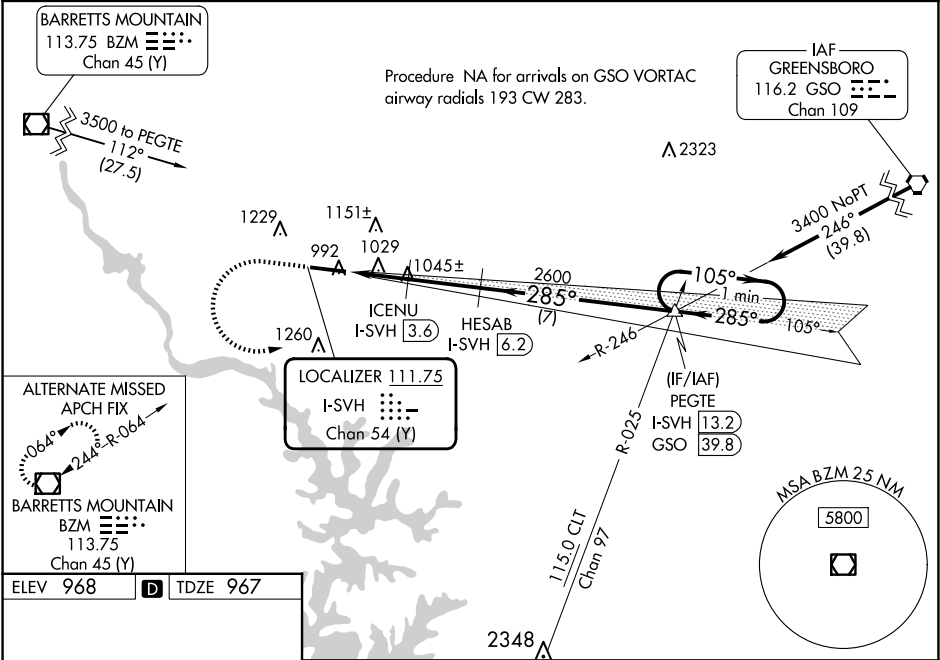

ELEV 968

TDZE 967

REIL Rwy 10 0

HIRL Rwy 10-28 0

|          |                       |                       |                         |                       |                  |      |                            |
|----------|-----------------------|-----------------------|-------------------------|-----------------------|------------------|------|----------------------------|
| 1700     | 3400                  | CLT                   | PEGTE                   |                       |                  |      |                            |
| hdg 105° |                       | R-025                 | △                       |                       |                  |      |                            |
|          |                       |                       | HESAB I-SVH 6.2         |                       | PEGTE I-SVH 13.2 |      | One Minute Holding Pattern |
|          |                       |                       | ICENU I-SVH 3.6         |                       |                  |      |                            |
|          |                       |                       | I-SVH 2                 |                       |                  |      |                            |
|          |                       |                       | I-SVH 1.2               |                       |                  |      |                            |
|          |                       |                       | 2600                    |                       |                  |      |                            |
|          |                       |                       | 1760                    |                       |                  |      |                            |
|          |                       |                       | 2600                    |                       |                  |      |                            |
|          |                       |                       | 105°                    |                       |                  |      |                            |
|          |                       |                       | 285°                    |                       |                  |      |                            |
|          |                       |                       | 3400                    |                       |                  |      |                            |
|          |                       |                       | GS 3.00°                |                       |                  |      |                            |
|          |                       |                       | TCH 50                  |                       |                  |      |                            |
|          |                       |                       | 0.8                     | 1.6                   | 2.6 NM           | 7 NM |                            |
| CATEGORY | A                     | B                     | C                       | D                     |                  |      |                            |
| S-ILS 28 | 1167-½                | 200 (200-½)           |                         |                       |                  |      |                            |
| S-LOC 28 | 1280-½                | 313 (400-½)           |                         |                       |                  |      |                            |
| CIRCLING | 1420-1<br>452 (500-1) | 1540-1<br>572 (600-1) | 1540-1½<br>572 (600-1½) | 1560-2<br>592 (600-2) |                  |      |                            |