



|                                                                              |                                |                    |                                                             |
|------------------------------------------------------------------------------|--------------------------------|--------------------|-------------------------------------------------------------|
| RNP APCH.                                                                    |                                |                    | MISSED APPROACH:<br>Climb to 4100 direct<br>DIYER and hold. |
| For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. |                                |                    |                                                             |
| AWOS-3<br>118.125                                                            | HOUSTON CENTER<br>134.95 269.4 | CLNC DEL<br>134.95 | UNICOM<br>122.7 (CTAF) 0                                    |

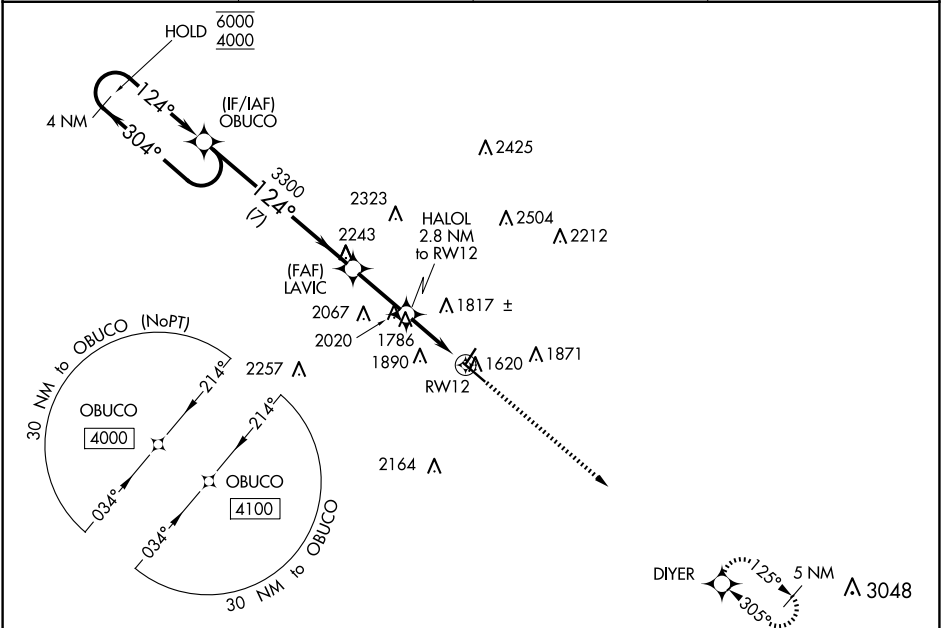

ELEV 1617 **D** TDZE 1586

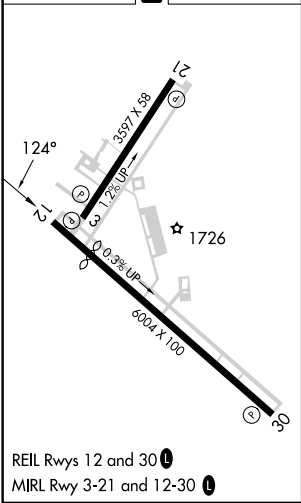

|                                                                                              |                       |                       |                         |                                                                                              |  |
|----------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------------|----------------------------------------------------------------------------------------------|--|
| 4 NM<br>Holding Pattern                                                                      |                       | 4100<br>↑             |                         | DIYER<br> |  |
| OBUCO                                                                                        |                       | LAVIC                 |                         | HALOL                                                                                        |  |
| 3300                                                                                         |                       | 3300                  |                         | 2.8 NM<br>to RW12                                                                            |  |
| 304°<br>124°                                                                                 |                       | 124°                  |                         | * 1.3 NM to<br>RW12                                                                          |  |
| GP 3.00°<br>TCH 40                                                                           |                       | * 2500                |                         | RW12                                                                                         |  |
| 7 NM                                                                                         |                       | 2.5 NM                |                         | 1.5 NM                                                                                       |  |
| 1.3 NM                                                                                       |                       |                       |                         |                                                                                              |  |
| CATEGORY                                                                                     | A                     | B                     | C                       | D                                                                                            |  |
| LPV DA                                                                                       | 1836-1 250 (300-1)    |                       |                         |                                                                                              |  |
| LNAV/<br>VNAV DA                                                                             | 1936-1½ 350 (400-1½)  |                       |                         |                                                                                              |  |
| LNAV MDA                                                                                     | 2040-1                | 454 (500-1)           | 2040-1½                 | 454 (500-1½)                                                                                 |  |
|  CIRCLING | 2320-1<br>703 (800-1) | 2340-1<br>723 (800-1) | 2380-2¼<br>763 (800-2¼) | 2540-3<br>923 (1000-3)                                                                       |  |