

WAAS CH 53604 W36A	APP CRS 360°	Rwy Idg TDZE Apt Elev	5550 326 333
--	------------------------	-----------------------------	---



RNAV (GPS) RWY 36
GEORGE M BRYAN (STF)


RNP APCH-GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C or above 54°C .
When local altimeter setting not received, use Golden Triangle Rgnl altimeter setting and increase LPV DA to 566 feet; increase LNAV/VNAV DA to 690 feet; increase all MDAs 40 feet and LNAV visibility Cat C/D ⅓ SM, and Circling visibility Cat C ¼ SM.
Baro-VNAV and VDP NA when using Golden Triangle Rgnl altimeter setting.

MISSED APPROACH: Climb to 3400 direct FESBO and hold, continue climb-in-hold to 3400.

AWOS-3PT 118.975	COLUMBUS APP CON★ 135.6 323.275	CLNC DEL 126.25	UNICOM 122.7 (CTAF)
----------------------------	---	---------------------------	-------------------------------

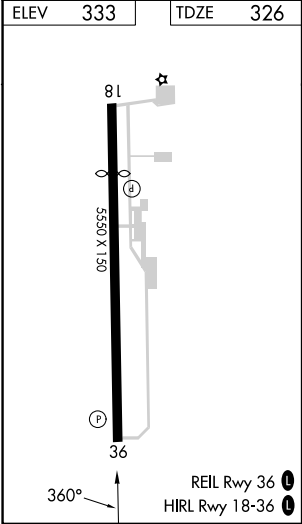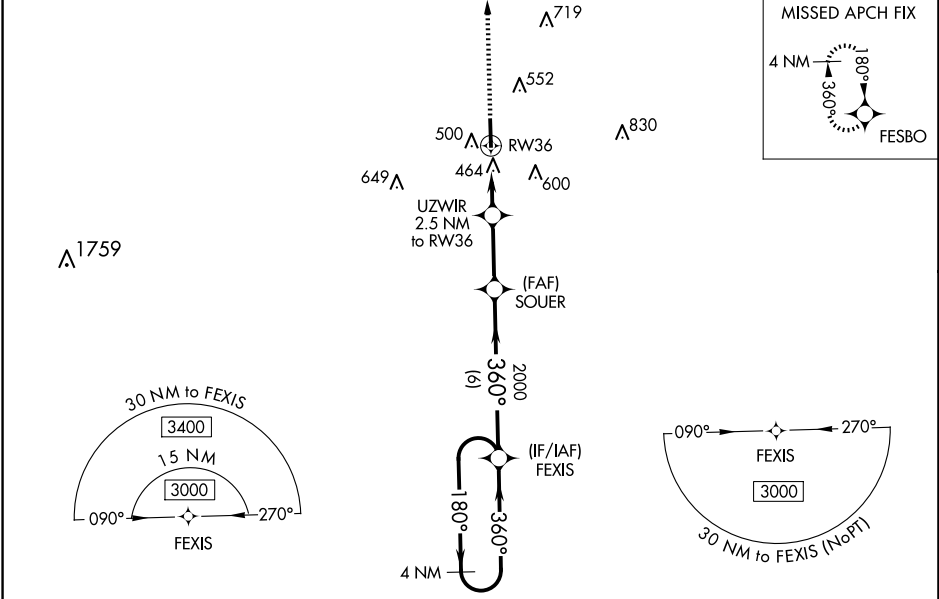

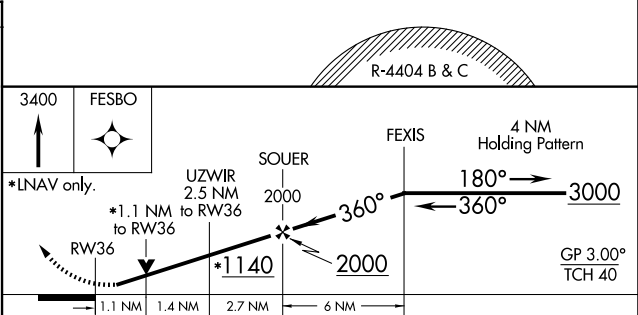				
*LNAV only.				
RW36				
*1.1 NM to RW36				
UZWIR 2.5 NM to RW36				
*1.140				
2000				
360°				
FEXIS				
4 NM Holding Pattern				
180° →				
← 360°				
3000				
GP 3.00° TCH 40				
1.1 NM 1.4 NM 2.7 NM 6 NM				
CATEGORY		A	B	C D
LPV DA	526-¾ 200 (200-¾)			
LNAV/VNAV DA	650-1 324 (400-1)			
LNAV MDA	720-1 394 (400-1)		720-1½ 394 (400-½)	
CIRCLING	920-1 587 (600-1)		920-1½ 1020-2¼ 587 (600-½) 687 (700-2¼)	

SC-4, 04 SEP 2025 to 02 OCT 2025

SC-4, 04 SEP 2025 to 02 OCT 2025