

WAAS CH 48835 W31A	APP CRS 306°	Rwy Ldg TDZE Apt Elev	6143 4940 4970
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 31

JOHNSON COUNTY (BYG)


⚠

When Rwy 13 VGSi inop, Circling Rwy 13 NA at night. Baro-VNAV and VDP NA when using Sheridan altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C (-16°F) or above 48°C (120°F). Circling NA southwest of Rwy 13-31. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Sheridan altimeter setting and increase all DA/MDA 200 feet; increase all LPV, LNAV/VNAV, and all LNAV and Circling Cat C/D visibilities ¾ mile.

MISSED APPROACH:

Climb to 6000, then climbing right turn to 7000 direct ONECI and hold.

ASOS 135.425	SALT LAKE CENTER 127.75 351.9	UNICOM 122.8 (CTAF)
------------------------	---	-------------------------------

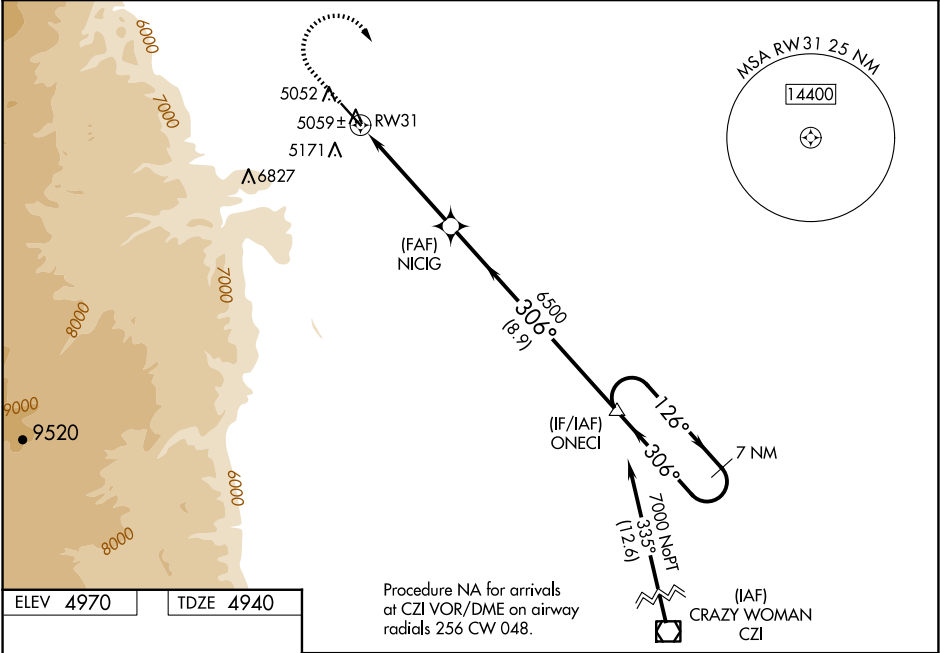

ELEV 4970	TDZE 4940	Procedure NA for arrivals at CZI VOR/DME on airway radials 256 CW 048.			
			VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 42).		
		* LNAV only	7 NM Holding Pattern		
* 1.1 NM to RW31		NICIG 6500	ONECI		
1.1 NM		3.7 NM	8.9 NM		
CATEGORY		A	B	C	D
LPV DA		5190-¾		250 (300-¾)	
LNAV/VNAV DA		5275-1⅛		335 (400-1⅛)	
LNAV MDA		5320-1	380 (400-1)	5320-1⅛	380 (400-1⅛)
CIRCLING		5440-1	470 (500-1)	5460-1½ 490 (500-1½)	5600-2 630 (700-2)

NW-1, 04 SEP 2025 to 02 OCT 2025

NW-1, 04 SEP 2025 to 02 OCT 2025