

TROY, ALABAMA

AL-5720 (FAA)

24137

WAAS CH 50137 W25A	APP CRS 254°	Rwy Idg TDZE Apt Elev	6197 394 397
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 25

TROY MUNI AT N KENNETH CAMPBELL FLD (TOI)


RNP APCH.





For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Montgomery Rgnl (Dannely Fld) altimeter setting. Rwy 25 helicopter visibility reduction below ¾ SM NA. Circling to Rwy 14, 32 NA at night. When local altimeter setting not received, use Montgomery Rgnl (Dannely Fld) altimeter setting and increase LPA DA to 747 and all visibilities ¼ SM, LNAV/VNAV DA to 840 and visibilities ½ SM, and all MDA 100 feet; increase LNAV Cts C and D and Circling Cts C visibility ¼ SM.

MISSED APPROACH:
Climb to 2200 direct
MAKEY and hold.

ATIS 120.925	CAIRNS APP CON ★ 121.1 319.25	TROY TOWER ★ 124.3 (CTAF) 0 306.9	GND CON 121.9 294.7	UNICOM 122.8
-----------------	----------------------------------	--------------------------------------	------------------------	-----------------

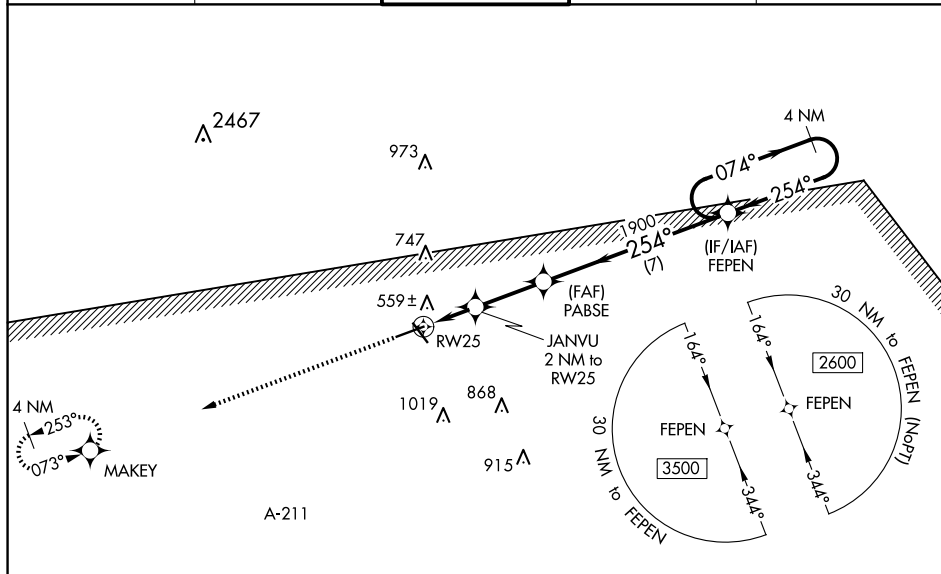

ELEV 397		TDZE 394
----------	--	----------

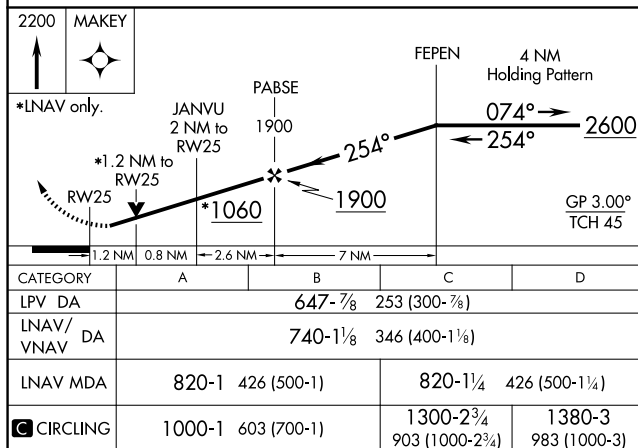

CATEGORY	A	B	C	D
LPV DA		647- $\frac{7}{8}$	253 (300- $\frac{7}{8}$)	
LNAV/ VNAV DA		740-1 $\frac{1}{8}$	346 (400-1 $\frac{1}{8}$)	
LNAV MDA	820-1 426 (500-1)		820-1 $\frac{1}{4}$	426 (500-1 $\frac{1}{4}$)
 CIRCLING	1000-1 603 (700-1)		1300-2 $\frac{3}{4}$ 903 (1000-2 $\frac{3}{4}$)	1380-3 983 (1000-3)

MIRL Rwy 7-25 and 14-32 **L**

TROY, ALABAMA
Amdt 3A 13SEP18

TROY MUNI AT N KENNETH CAMPBELL FLD (TOI)
31°52'N-86°01'W RNAV (GPS) RWY 25

RNAV (GPS) RWY 25

SE-4, 04 SEP 2025 to 02 OCT 2025