
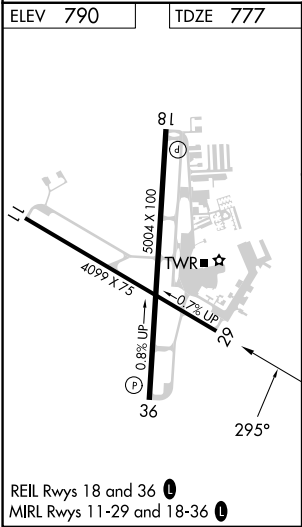


APP CRS	Rwy Idg	4099
295°	TDZE	777
	Apt Elev	790

RNAV (GPS) RWY 29
GEORGETOWN EXEC (GTU)

RNP APCH. ▼ Rwy 29 helicopter visibility reduction below ¾ SM NA. VDP NA when using Skylark Field altimeter setting. When local altimeter setting not received, use Skylark Field altimeter setting and increase all MDA 80 feet increase LNAV and Circling Cat C/D visibility ¼ SM. ▲					MISSED APPROACH: Climbing right turn to 3000 direct DARTE and hold.	
ATIS	AUSTIN APP CON	GEORGETOWN TOWER ★	GND CON	CLNC DEL	CLNC DEL	UNICOM
118.6	119.0 370.85	120.225 (CTAF) 0	119.125	119.125	121.1 (when twr closed)	123.0

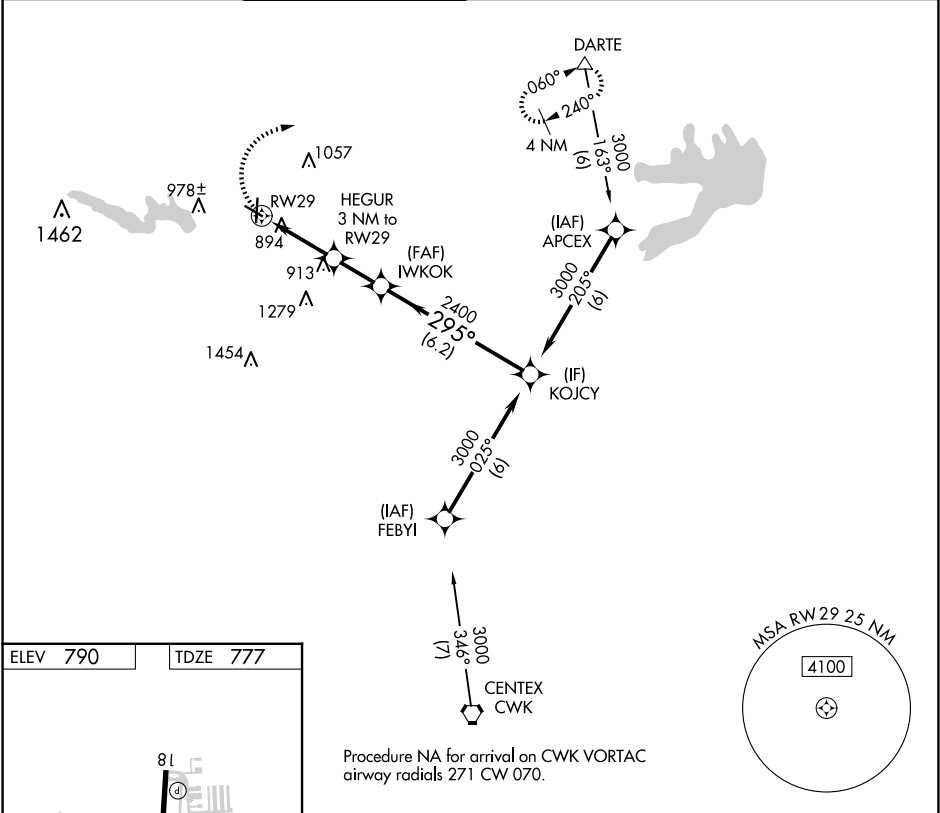

3000 		DARTE 		HEGUR 3 NM to RW29				IWKOK		KOJCY	
		1.2 NM to RW29		3.04°		TCH 40		295°		3000	
				1760		2400					
1.2		1.8		2 NM		6.2 NM					
CATEGORY		A		B		C		D			
LNAV MDA		1220-1 443 (500-1)		1220-1⅓ 443 (500-1⅓)							
 CIRCLING		1240-1 450 (500-1)		1340-1 550 (600-1)		1360-1½ 570 (600-1½)		1640-2¾ 850 (900-2¾)			