


APP CRS	Rwy Idg	5646
090°	TDZE	590
	Apt Elev	590


RNAV (GPS) RWY 9
ERIE-OTTAWA INTL (PCW)

RNP APCH - GPS.	When local altimeter setting not received, use Toledo Executive altimeter setting and increase all MDA 80 feet and all Cat C/D visibilities ¼ mile. Rwy 9 helicopter visibility reduction below ¾ SM NA. Circling Rwy 18, 36 NA at night.	MISSED APPROACH: Climb to 2500 direct KUKAF and hold.
-----------------	---	--

AWOS-3 118.775	CLEVELAND APP CON 126.35 346.325	UNICOM 122.8 (CTAF) 0
-------------------	-------------------------------------	--------------------------

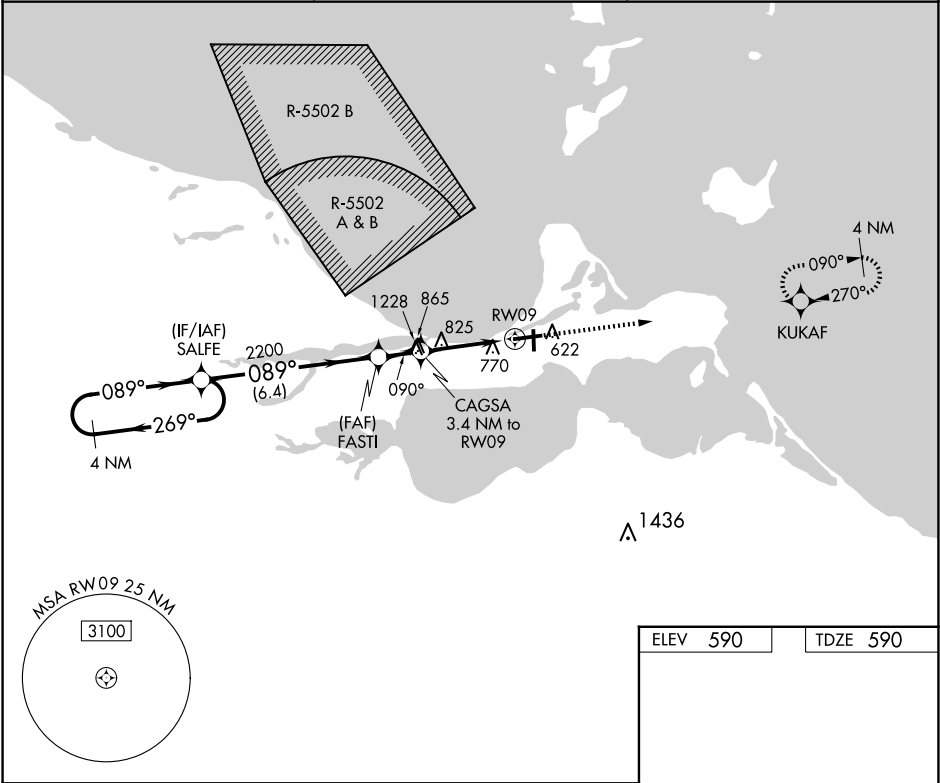

4 NM Holding Pattern				
SALFE				
FASTI				
CAGSA 3.4 NM to RWY 9				
RWY 9				
2500 KUKAF				
3000 ← 269° 089° → 089° 2200 3.00° TCH 40 090° 1720				
6.4 NM 1.5 NM 3.4 NM				
CATEGORY	A	B	C	D
LNAV MDA	1140-1	550 (600-1)	1140-1½	550 (600-1½)
CIRCLING	1140-1	550 (600-1)	1180-1½ 590 (600-1½)	1580-3 990 (1000-3)

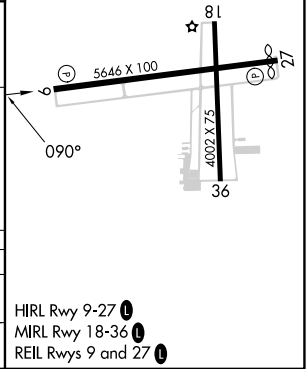

EC-2, 04 SEP 2025 to 02 OCT 2025

EC-2, 04 SEP 2025 to 02 OCT 2025