

WAAS CH 70435 W22A	APP CRS 222°	Rwy Idg TDZE 152 Apt Elev 158
--	------------------------	---


RNAV (GPS) RWY 22

ROCKY MOUNT/WILSON RGNL (R.WI)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C (14°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Wayne Exec Jetport altimeter setting. When local altimeter setting not received, use Wayne Exec Jetport altimeter setting and increase all DA 59 feet and all visibilities ¼ mile; increase all MDA 60 feet and LNAV Cats C/D and Circling Cat C visibility ¼ mile. Rwy 22 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 1000 then
climbing right turn to
2500 direct FENIM
and hold.

ASOS 118.875	WASHINGTON CENTER 123.85 279.65	UNICOM 123.05 (CTAF) 0
------------------------	---	----------------------------------

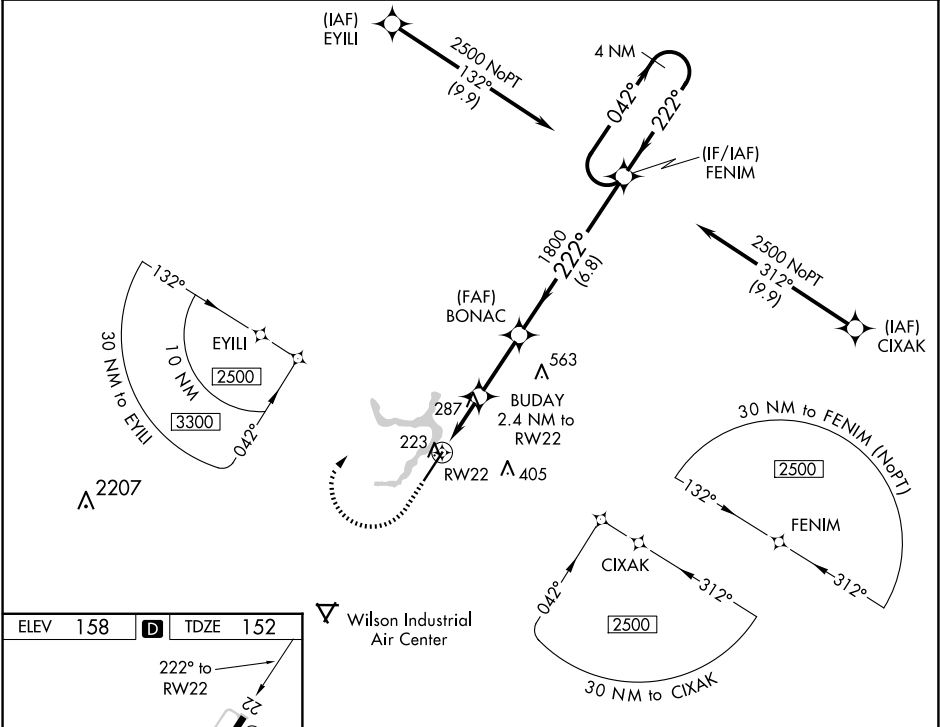

ELEV 158	D	TDZE 152
REIL Rwy 22 0		
HIRL Rwy 4-22 0		

1000	2500	FENIM	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 42).	4 NM Holding Pattern
*LNAV only.				
BUDAY 2.4 NM to RW22				
*1.2 NM to RW22				
RW22 960* 1800 222° 042° 2500				
GP 3.00° TCH 52				
CATEGORY	A	B	C	D
LPV DA	436-7/8	284 (300-7/8)		
LNAV/VNAV DA	513-1 1/8	361 (400-1 1/8)		
LNAV MDA	560-1 408 (500-1)	560-1 1/8 408 (500-1 1/8)		
CIRCLING	600-1 442 (500-1)	620-1 462 (500-1)	720-1 1/2 562 (600-1 1/2)	760-2 602 (700-2)