WAAS CH 81909 W35A	APP CRS 352°	Rwy ldg 5110 TDZE 3176 Apt Elev 3188

RNAV (GPS) RWY 35
SHALZ FLD (CBK)

RNP APCH-GPS.

Baro-VNAV and VDP NA when using Goodland altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use Goodland altimeter setting: increase LPV DA to 3511 feet and visibility ¼ SM, LNAV/VNAV DA to 3561 feet and visibility ⅜ SM; increase all MDAs 140 feet and visibility Cat C ⅜ SM.

MISSED APPROACH: Climb to 5100 direct YEBVI and hold.

AWOS-3P	DENVER CENTER	UNICOM
118.175	132.7 226.675	122.8 (CTAF) L

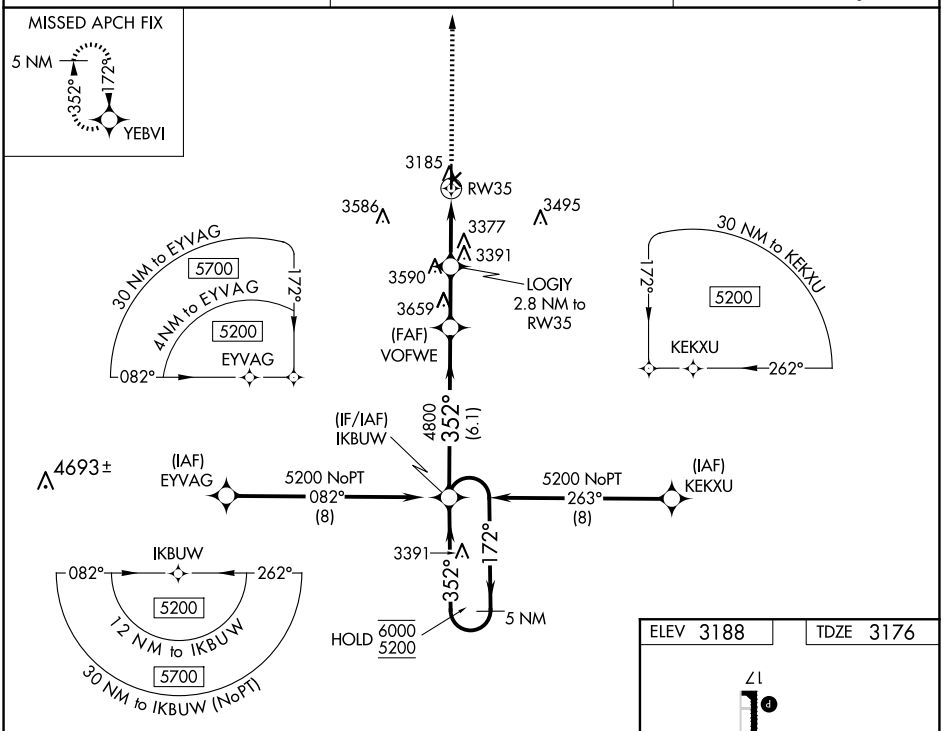

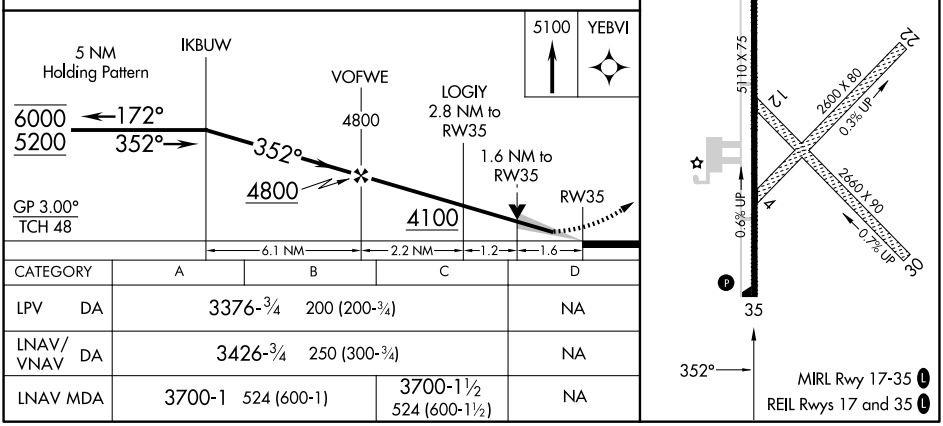

CATEGORY	A	B	C	D
LPV DA	3376-¾ 200 (200-¾)			NA
LNAV/VNAV DA	3426-¾ 250 (300-¾)			NA
LNAV MDA	3700-1 524 (600-1)		3700-1½ 524 (600-1½)	NA

NC-2, 04 SEP 2025 to 02 OCT 2025

NC-2, 04 SEP 2025 to 02 OCT 2025