

WAAS CH 78220 W12A	APP CRS 117°	Rwy Idg TDZE Apt Elev	3449 940 940
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 12

M GRAHAM CLARK DOWNTOWN (PLK)

Baro-VNAV NA when using Branson altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Branson altimeter setting. Obtain local altimeter setting on CTAF; when not received, use Branson altimeter setting and increase all DA 65 feet and all MDA 80 feet; increase LPV all Cats visibility ½ mile and LNAV/VNAV all Cats visibility ¼ mile.

MISSED APPROACH:
Climb to 3200 direct
UZAPO and hold.

SPRINGFIELD APP CON 126.35	UNICOM 122.7 (CTAF) 0
--------------------------------------	---------------------------------

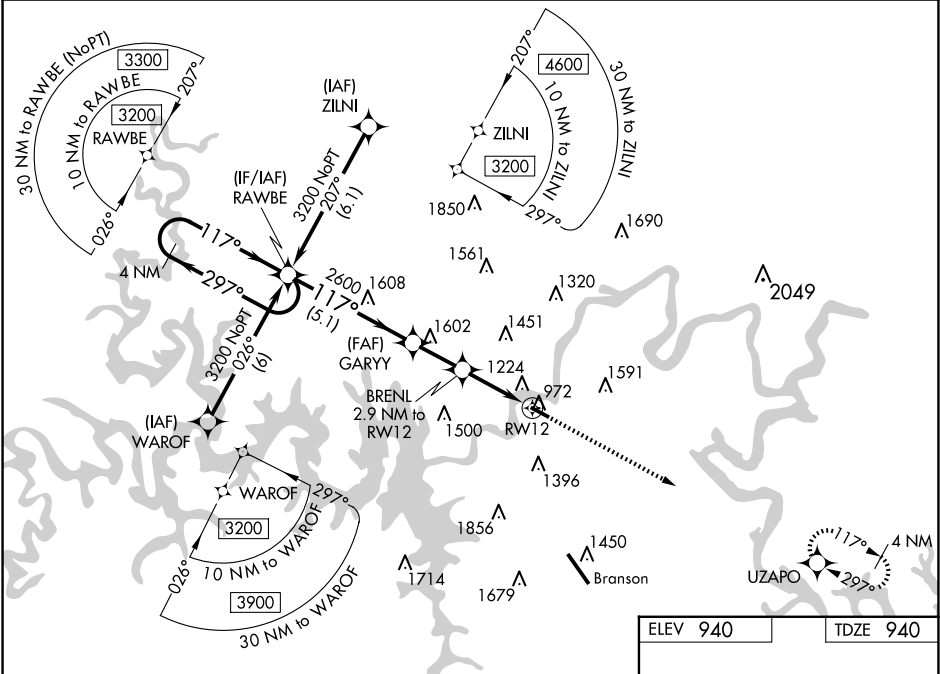

4 NM Holding Pattern		RAWBE		*LNAV only		3200	UZAPO
3200 ← 297° 117° →		GARYY 2600		BRENL 2.9 NM to RW12		117° to RW12	
GP 3.10° TCH 40		2600		*1920		RW12	
5.1 NM		2 NM		1.2 NM		1.7 NM	
CATEGORY	A	B	C	D			
LPV DA	1140-¾	200 (200-¾)	NA				
LNAV/ VNAV DA	1416-1⅝	476 (500-1⅝)	NA				
LNAV MDA	1540-1	600 (600-1)	NA				
CIRCLING	1560-1	620 (700-1)	NA				

ELEV 940	TDZE 940
REIL Rws 12 and 30 0	
MIRL Rwy 12-30 0	

NC-3, 04 SEP 2025 to 02 OCT 2025

NC-3, 04 SEP 2025 to 02 OCT 2025