

WAAS CH 82232 W05A	APP CRS 049°	Rwy Idg TDZE 96 Apt Elev 101	6002
--	------------------------	--	-------------

RNAV (GPS) RWY 5

LOWCOUNTRY RGNL (RBW)

⚠


For uncompensated Baro-VNAV systems, procedure NA below -15°C (5°F) or above 54°C (130°F).
DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA when using Charleston AFB/Intl altimeter setting.

⚠

Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Charleston AFB/Intl altimeter setting and increase all DA 78 feet and all MDA 80 feet; increase LPV, LNAV/VNAV all Cats and Circling Cat D visibility ¼ mile, increase LNAV Cat C - D visibility ½ mile, increase Circling Cat C visibility ½ mile.

MISSED APPROACH:
Climb to 2100 direct LAMKE and hold.

AWOS-3PT 118.725	CHARLESTON APP CON 120.7 306.925	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

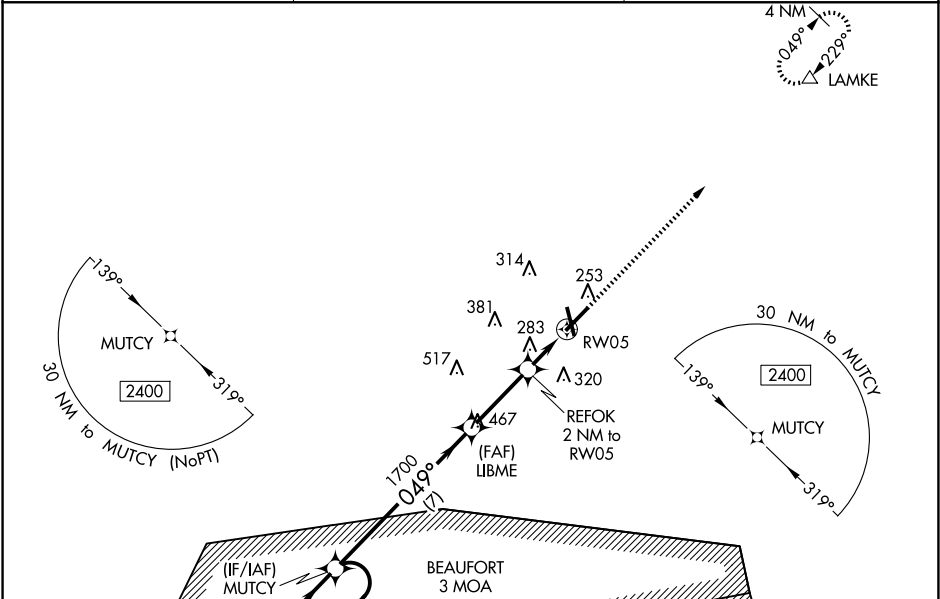

ELEV 101		TDZE 96	
4 NM Holding Pattern		MUTCY VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 49°).	
2400 ← 229°		↑ 2100 LAMKE	
049° →		* LNAV only.	
GP 3.00° TCH 53		* 1.1 NM to RW05	
1700		RW05	
7 NM		2.9 NM	
0.9 NM		1.1 NM	
CATEGORY	A	B	C
LPV DA		431-1 7/8	335 (400-1 7/8)
LNAV/VNAV DA		507-1 3/8	411 (500-1 3/8)
LNAV MDA	540-1	444 (500-1)	540-1 3/8 444 (500-1 3/8)
CIRCLING	620-1 519 (600-1)	640-1 539 (600-1)	700-1 1/2 599 (600-1 1/2) 700-2 599 (600-2)