

WAAS
CH 93835
W22A

APP CRS
220°

Rwy Idg
TDZE 182
Apt Elev 182

RNAV (GPS) RWY 22

DEXTER B FLORENCE MEML FLD (ADF')


▼

▲ NA

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hot Springs altimeter setting and increase all MDAs 120 feet, and increase LP and LNAV Cat C visibility 3⁄8 SM and Circling Cat C visibility 1⁄2 mile. Night landing: Rwy 22 NA. Helicopter visibility reduction below 1 NM NA.

MISSED APPROACH: Climb to 2000 direct CUBUG and hold.

AWOS-3PT 118.175	MEMPHIS CENTER 128.475 377.15	UNICOM 122.7 (CTAF) 0
---------------------	----------------------------------	--------------------------

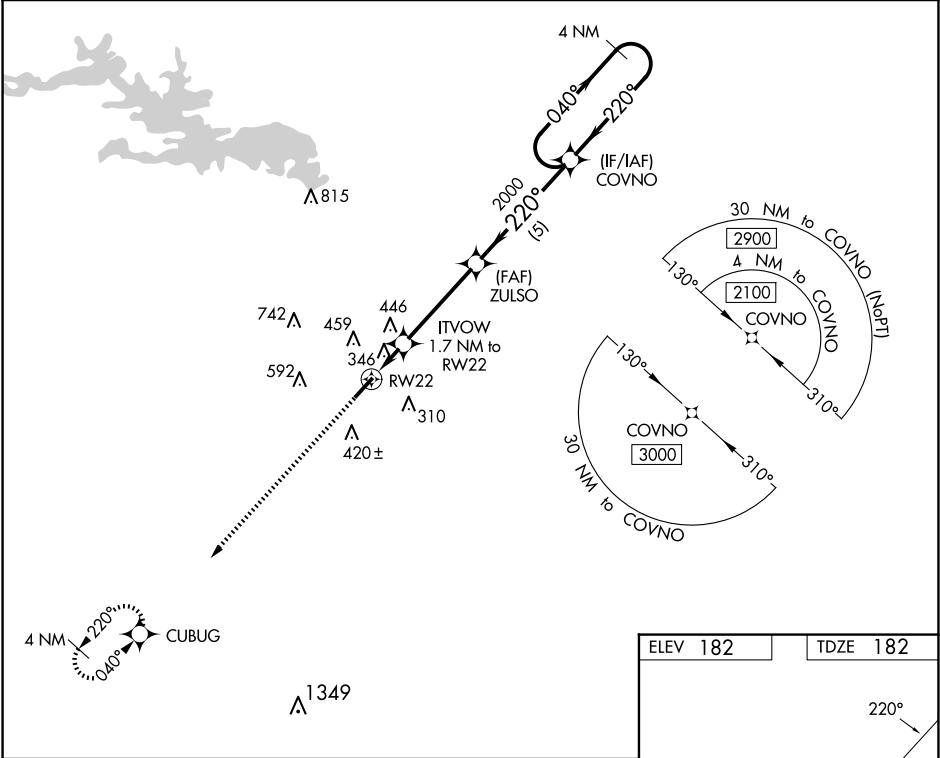

2000

CUBUG

Visual Segment - Obstacles.

ITVOW
1.7 NM to
RW22

ZULSO

COVNO

4 NM
Holding Pattern

RW22

760

2000

2100

1.7

3.9 NM

5 NM

CATEGORY	A	B	C	D
LP MDA	600-1	418 (500-1)	600-1 ^{3⁄8} 418 (500-1 ^{3⁄8})	NA
LNAV MDA	680-1	498 (500-1)	680-1 ^{3⁄8} 498 (500-1 ^{3⁄8})	NA
CIRCLING	760-1 578 (600-1)	800-1 618 (700-1)	1040-2 ^{1⁄2} 858 (900-2 ^{1⁄2})	NA

