

WAAS
CH **72609**
W14A

APP CRS
141°

Rwy Idg
TDZE
Apt Elev

4203
2546
2546

RNAV (GPS) RWY 14

BROKEN BOW MUNI/KEITH GLAZE FLD (BBW)

RNP APCH - GPS.


▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. When local altimeter setting not received, use LBF altimeter setting: increase LPV DA to 2947 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 3337 feet and all visibilities ¾ SM; increase all MDAs 160 feet and LNAV visibility Cat B ¾ SM, and Circling visibility Cat B ¾ SM. Baro/VNAV and VDP NA when using LBF altimeter setting. Rwy 14 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 4300 direct LUXXE and hold.

ASOS 120.0	DENVER CENTER 132.7 226.675	UNICOM 122.8 (CTAF) 0
----------------------	---------------------------------------	---------------------------------

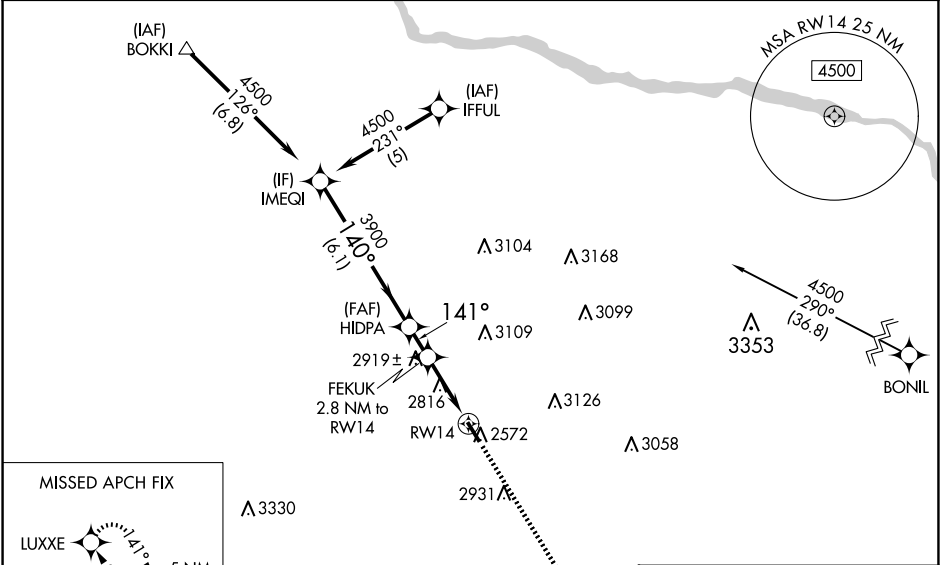

ELEV 2546		TDZE 2546	
IMEQI		LUXXE	
4500		4300	
140°		141°	
3900		3480	
GP 3.00°		RWY 14	
TCH 40		0.0% UP	
6.1 NM		1.3 NM	
1.1 NM		1.9 NM	
CATEGORY	A	B	C
LPV DA	2801-1	255 (300-1)	NA
LNAV/VNAV DA	3191-17/8	645 (700-17/8)	NA
LNAV MDA	3180-1	634 (700-1)	NA
CIRCLING	3180-1	634 (700-1)	NA