


WAAS CH 49103 W06A	APP CRS 058°	Rwy Ldg TDZE Apt Elev	6500 67 67
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) Z RWY 6

DEADHORSE (SCC) (PASC)

RNP APCH. ▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, and increase LNAV/VNAV all Cats and LNAV Cats C/D/E visibility to RVR 4500. # RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR AS	MISSED APPROACH: Climb to 500 then climbing right turn to 1900 direct CUBSU and hold.
--	-------------	---

AFIS ★ 118.4	ANCHORAGE CENTER 134.4 370.9	DEADHORSE RADIO 123.6 (CTAF) 0
------------------------	--	--

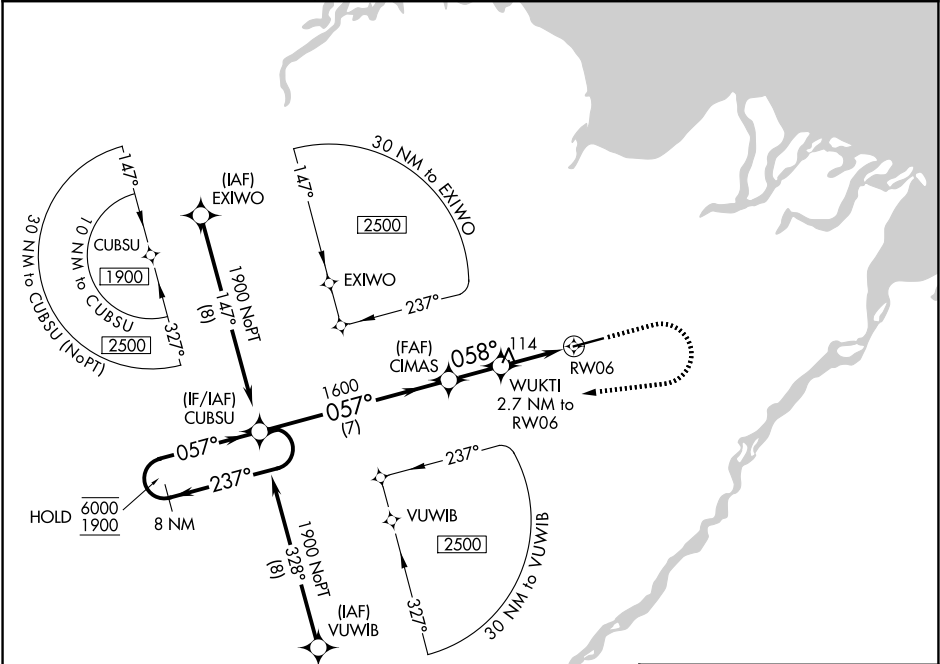

ELEV 67		D TDZE 67	
8 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 50).	
CUBSU		CUBSU	
GP 3.00° TCH 58		* LNAV only.	
7 NM		1.9 NM	
1.9 NM		0.8 NM	
CIRCLING		HIRL Rwy 6-24 0	
CATEGORY	A	B	C
LPV DA#	267/24 200 (200-½)		
LNAV/VNAV DA	369/24 302 (400-½)		
LNAV MDA	380/24 313 (400-½)		
CIRCLING	540-1 473 (500-1)	580-1½ 513 (600-1½)	620-2 553 (600-2)