

WAAS CH 61213 W31A	APP CRS 313°	Rwy Ldg TDZE 1020 Apt Elev 1031
--	------------------------	---

RNAV (GPS) RWY 31

ST CLOUD RGNL (STC)

RNP APCH - GPS.


Baro-VNAV and VDP NA when using Little Falls altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. For inop ALS when using Little Falls altimeter setting, increase LPV all Cats visibility to ¾ SM and LNAV/VNAV all Cats visibility to 1 ¾ SM and LNAV Cats C and D visibility to 1 ¾ SM. When local altimeter setting not received, use Little Falls altimeter setting, increase LPV DA to 1296 feet, increase LNAV/VNAV DA to 1503 feet and all visibilities ¼ SM; increase all MDAs 80 feet and LNAV visibility Cat C and D ¼ SM, and Circling visibility Cat C and D ¼ SM. For inop ALS, increase LNAV/VNAV visibility all Cats to 1 ¾ SM.

MALS R


MISSED APPROACH:

Climb to 3000 direct WELOK and hold.

ATIS 119.375	MINNEAPOLIS CENTER 121.05 235.775	ST. CLOUD TOWER ★ 118.25 (CTAF) 0	GND CON 123.75
------------------------	---	---	--------------------------

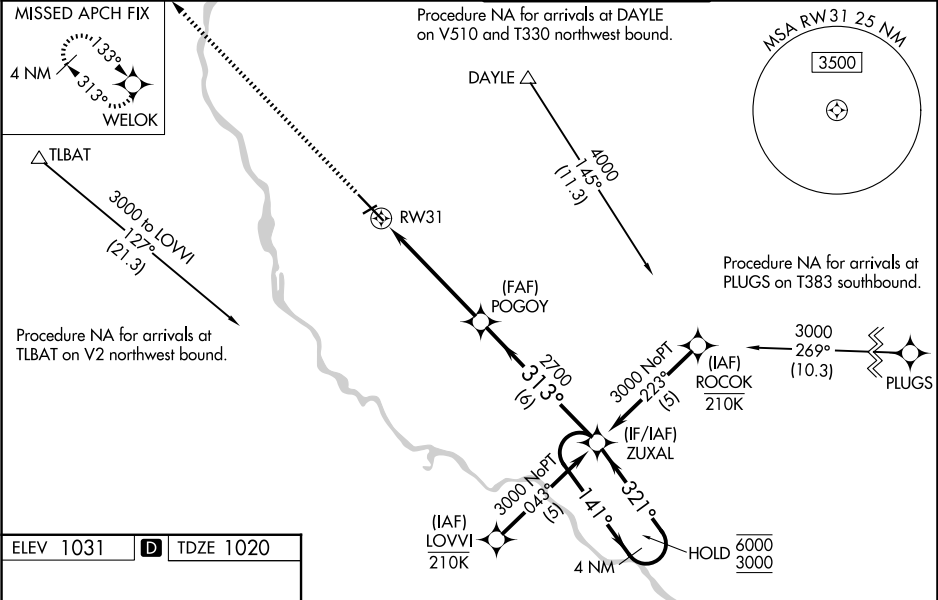

ELEV 1031	D	TDZE 1020
-----------	----------	-----------

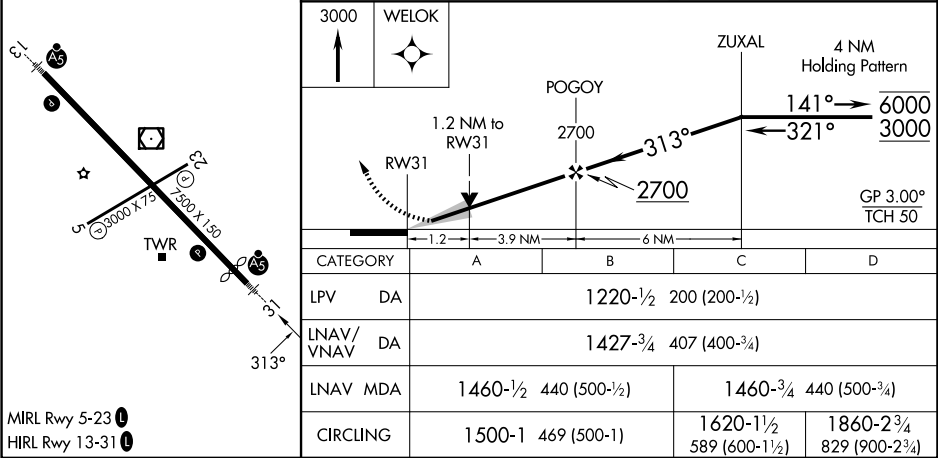

MIRL Rwy 5-23 0

HIRL Rwy 13-31 0