

WAAS CH 40127 W13A	APP CRS 131°	Rwy Idg 5107 TDZE 45 Apt Elev 45
--	------------------------	---


RNAV (GPS) RWY 13

BAY CITY RGNL (BYY)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F).
⚠ Rwy 13, 31 helicopter visibility reduction below 1 SM NA. RADAR required. DME/DME RNP-0.3 NA.
When local altimeter setting not received, use Palacios altimeter setting and increase all DA 63 feet and all MDA 80 feet; increase LNAV visibility Cat C ¼ mile. VDP and Baro-VNAV N/A when using Palacios altimeter setting.

MISSED APPROACH:
Climb to 2000 direct LEMUR and hold.

AWOS-3PT 118.075	HOUSTON CENTER 128.6 360.8	UNICOM 122.8 (CTAF) 0
----------------------------	--------------------------------------	---------------------------------

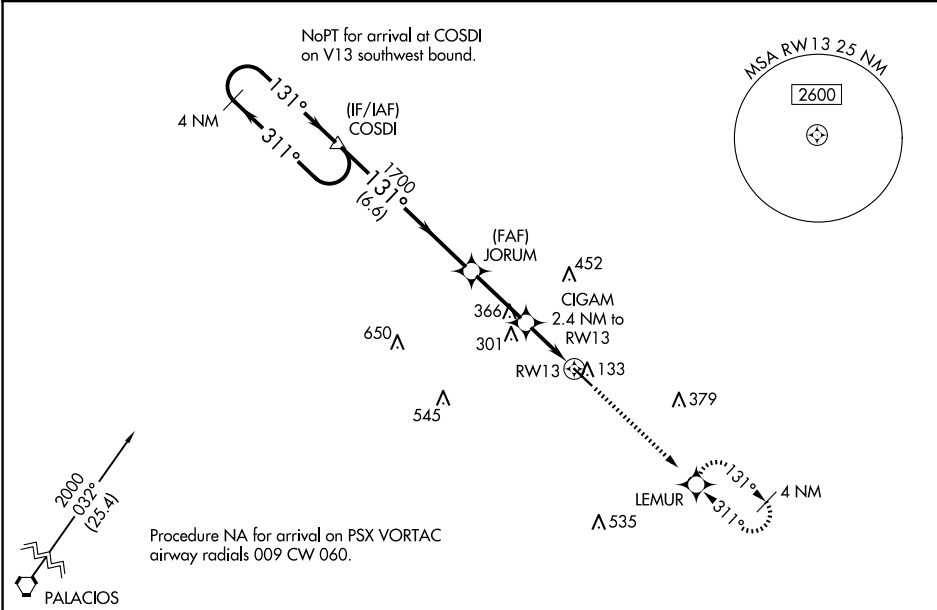

ELEV 45		TDZE 45	
4 NM Holding Pattern		2000	
GP 3.00° TCH 45		*840	
6.6 NM		2.7 NM	
1.6		0.8	
CATEGORY	A	B	C
LPV DA	295-1	250 (300-1)	NA
LNAV/VNAV DA	295-1	250 (300-1)	NA
LNAV MDA	460-1	415 (500-1)	460-1 1/8 415 (500-1 1/8)
CIRCLING	500-1	455 (500-1)	620-1 1/2 575 (600-1 1/2)

REIL Rwy 13 0
REIL Rwy 31
MIRL Rwy 13-31 0