

WAAS CH 90511 W09A	APP CRS 091°	Rwy Idg TDZE 125 Apt Elev 125
--	------------------------	---

RNAV (GPS) RWY 9L

BARTOW EXEC (BOW)

RNP APCH.


▼

⚠


Rwy 9L helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Tampa Intl altimeter setting and increase LPV DA to 548 feet, LNAV/VNAV DA to 645 feet and all MDA 120 feet, increase LNAV Cat C and D visibility ¼ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. VDP and Baro-VNAV NA when using Tampa Intl altimeter setting.

MISSED APPROACH: Climb to 2000 direct IVONY and hold.


AWOS-3 123.775	TAMPA APP CON 120.65 290.3	BARTOW TOWER ★ 121.2 0 (CTAF)	GND CON 121.9	UNICOM 122.95
--------------------------	--------------------------------------	---	-------------------------	-------------------------

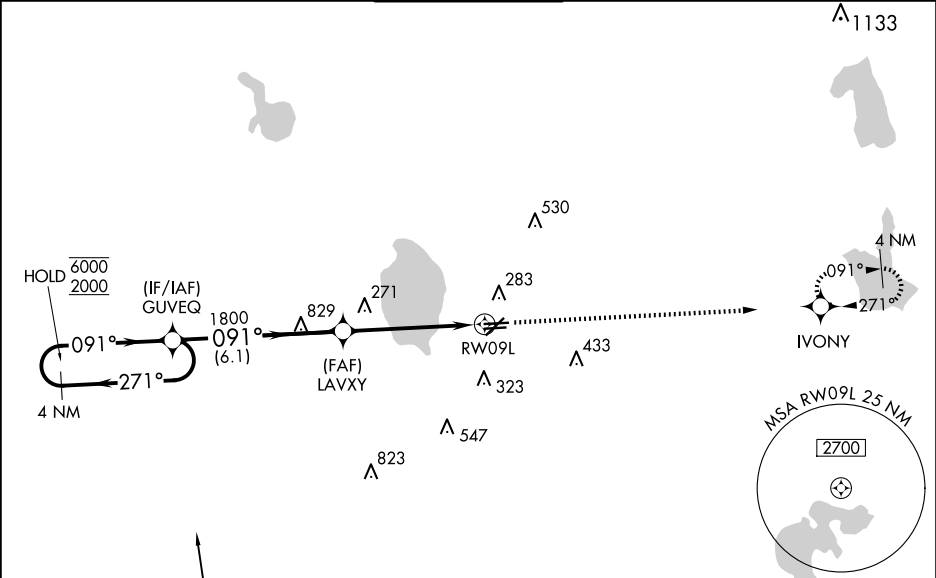

Procedure NA for arrival at CROWD on V7 southbound and V509 southeast bound.

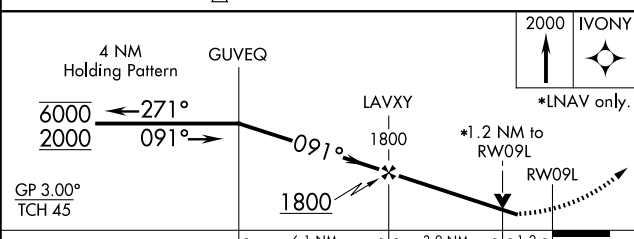

CATEGORY	A	B	C	D
LPV DA		442-1¼	317 (400-1¼)	
LNAV/VNAV DA		539-1½	414 (500-1½)	
LNAV MDA	540-1	415 (500-1)	540-1¼	415 (500-1¼)

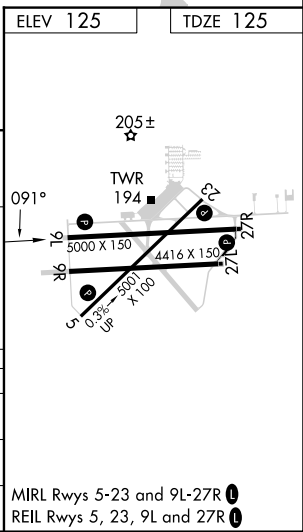

SE-3, 04 SEP 2025 to 02 OCT 2025