

WAAS CH 61234 W23A	APP CRS 232°	Rwy Idg 5505 TDZE 1523 Apt Elev 1545
--	------------------------	---

RNAV (GPS) RWY 23
SCOTT MUNI (SCX)

T
A NA

Night landing: Rwy 5 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/ODAL RNP-0.3 NA. When local altimeter setting not received, use Monticello altimeter setting: increase LPV all Cats DA to 2005 feet, LNAV/VNAV all Cats DA to 2153 feet, LPV visibility ½ mile, LNAV/VNAV ½ mile; increase all MDA 240 feet and LNAV Cat C/D visibility ½ mile, Circling Cat B ¼ mile, Circling Cat C 1 mile and Circling Cat D ¾ mile. Inop table does not apply to LPV and LNAV all Cats. For inop ODALS, increase LNAV/VNAV Cat D visibility to 1 ½ mile. For inop ODALS when using Monticello altimeter setting, increase LPV all Cats visibility to 1 ½ mile, LNAV/VNAV all Cats to 2 ½ mile. When using Monticello altimeter setting, inop table does not apply to LNAV Cats A/C/D. VDP and Baro-VNAV NA when using Monticello altimeter setting.


ODALS



MISSED APPROACH:
Climb to 3900 direct
ZITGO and hold.


AWOS-3
135.025

INDIANAPOLIS CENTER
124.625 371.925

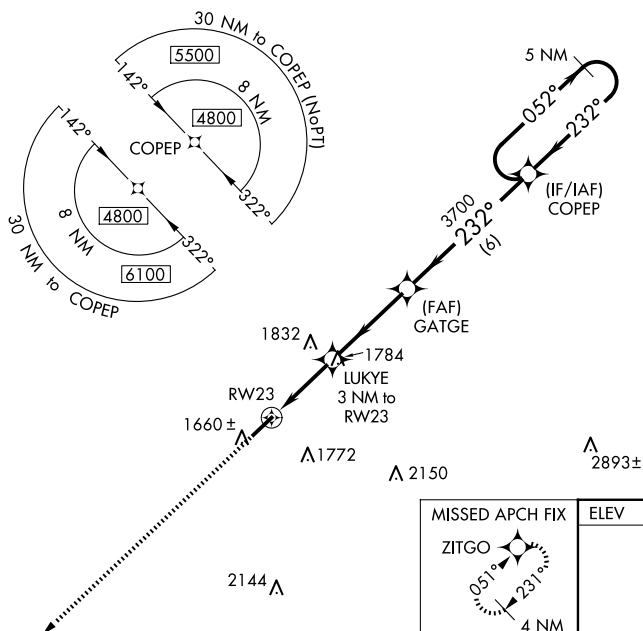UNICOM
122.8 (CTAF) **L**

MISSED APCH FIX
ZITGO
051° 231°
4 NM

ELEV	1545		TDZE	1523
------	------	--	------	------



3900	ZITGO
	

* LNAV only.

only. t

GATGE

COPEP 3 NM Holding Pattern

*1.5 NM

o RW23

GATGE

COPEP 3 NM Holding Pattern

to RW23

3700

COPEP 3 NM Holding Pattern

RW23 ;

3700

COPEP 3 NM Holding Pattern

↓

3700

COPEP 3 NM Holding Pattern

3700

COPEP 3 NM Holding Pattern

	1	5	1
--	---	---	---

3700

COPEP 3 NM Holding Pattern

OPY	A
-----	---

3700

COPEP 3 NM Holding Pattern

CATEGORY		A	B	C	D
LPV	DA		1773-1	250 (300-1)	
RNAV	DA		1921-1 $\frac{1}{8}$	398 (400-1 $\frac{1}{8}$)	
RNAV	MDA	2040-1	517 (500-1)	2040-1 $\frac{3}{8}$	517 (500-1 $\frac{3}{8}$)
 CIRCLING		2040-1	495 (500-1)	2200-1 $\frac{3}{4}$ 655 (700-1 $\frac{3}{4}$)	2260-2 $\frac{1}{4}$ 715 (800-2 $\frac{1}{4}$)