



T

A

When local altimeter setting not received, use CAK altimeter setting and increase all MDAs 60 feet and visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 2900 then left turn direct ACO VOR/DME and hold.

|                   |                                     |                    |                           |
|-------------------|-------------------------------------|--------------------|---------------------------|
| AWOS-3<br>118.675 | CLEVELAND APP CON★<br>125.5 371.875 | CLNC DEL<br>125.65 | UNICOM<br>123.05 (CTAF) 0 |
|-------------------|-------------------------------------|--------------------|---------------------------|

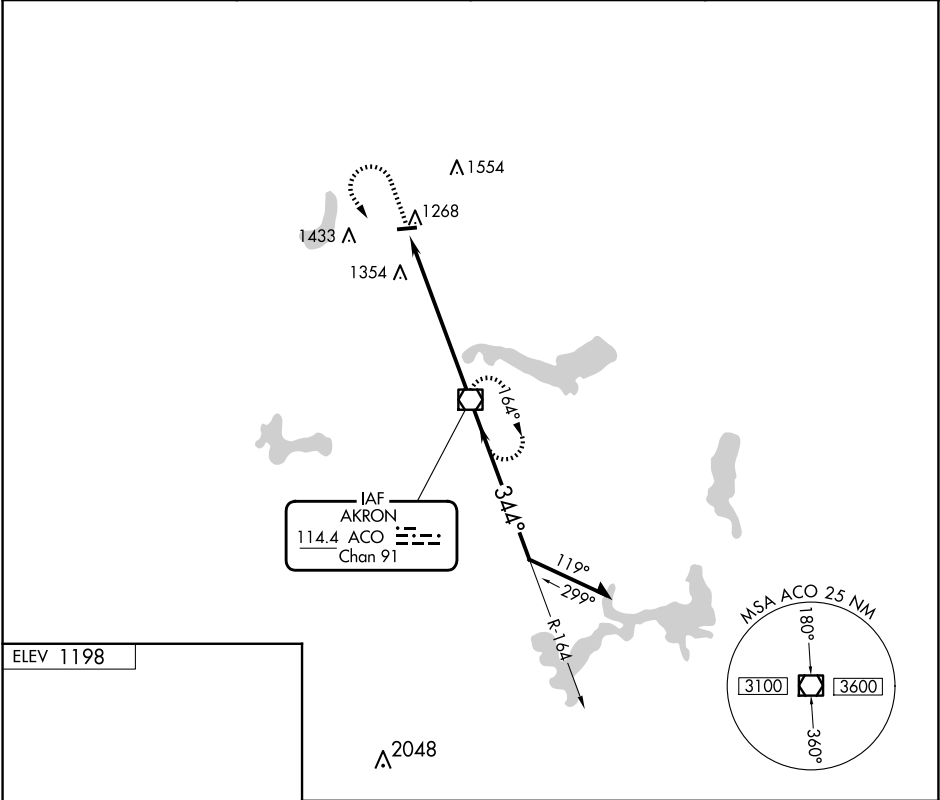

| FAF to MAP 6.5 NM |      |      |      |      |      | CATEGORY | A           | B           | C            | D  |
|-------------------|------|------|------|------|------|----------|-------------|-------------|--------------|----|
| Knots             | 60   | 90   | 120  | 150  | 180  | CIRCLING | 1740-1      | 1800-1      | 1860-1¾      | NA |
| Min:Sec           | 6:30 | 4:20 | 3:15 | 2:36 | 2:10 |          | 542 (600-1) | 602 (700-1) | 662 (700-1¾) |    |

EC-2, 04 SEP 2025 to 02 OCT 2025

EC-2, 04 SEP 2025 to 02 OCT 2025