

WAAS CH 42615 W15A	APP CRS 146°	Rwy Idg TDZE Apt Elev	4000 1025 1025
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 15


PLATTEVILLE MUNI (PVB)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F).
When local altimeter setting not received, use DBQ altimeter setting and increase LPV DA to 1331 feet; increase LNAV/VNAV DA to 1394 feet; increase all MDAs 60 feet and LNAV visibility Cat C ¼ SM, and Circling visibility Cat C ¼ SM. Baro-VNAV and VD NA when using Dubuque altimeter setting. Circling Rwy 7, 25 NA at night.

MISSED APPROACH:
Climb to 3000 direct ZAWDI and hold.

AWOS-3 120.575	CHICAGO CENTER 133.95 281.4	UNICOM 122.7 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

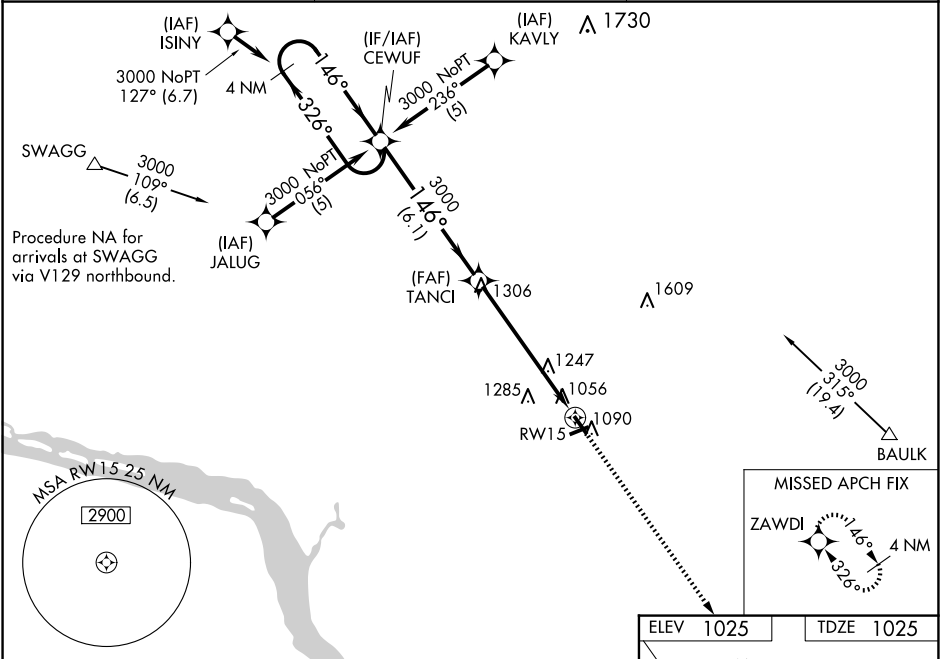

4 NM Holding Pattern

CEWUF

TANC1

3000

326°

146°

GP 3.00° TCH 40

1.6 NM to RW15

RW15

6.1 NM

4.4 NM

1.6

CATEGORY	A	B	C	D
LPV DA	1275-1	250 (300-1)		NA
LNAV/VNAV DA	1338-1	313 (400-1)		NA
LNAV MDA	1560-1	535 (600-1)	1560-1½ 535 (600-1½)	NA
CIRCLING	1560-1 535 (600-1)	1600-1 575 (600-1)	1600-1½ 575 (600-1½)	NA

ELEV 1025

TDZE 1025

146°

3000

ZAWDI

1.6 NM to RW15

RW15

4000 X 75

3600 X 75

0.8% UP

REIL Rwy 15 and 33

MIRL Rwy 7-25 and 15-33