

WAAS CH 69205 W17A	APP CRS 170°	Rwy Idg TDZE 763 Apt Elev 763
--	------------------------	---

RNAV (GPS) RWY 17

HURON COUNTY MEML (BAX)

RNP APCH.


▼

▲

Baro-VNAV NA when using MBS Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use MBS Intl altimeter setting and increase all DA 129 feet and all MDA 140 feet, increase LPV all Cts visibility ¾ mile; increase LNAV Cat C ½ mile. Rwy 17 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 3000 direct AREBE and hold.

AWOS-3 118.6	CLEVELAND CENTER 127.7 290.425	UNICOM 123.075 (CTAF) 0
------------------------	--	-----------------------------------

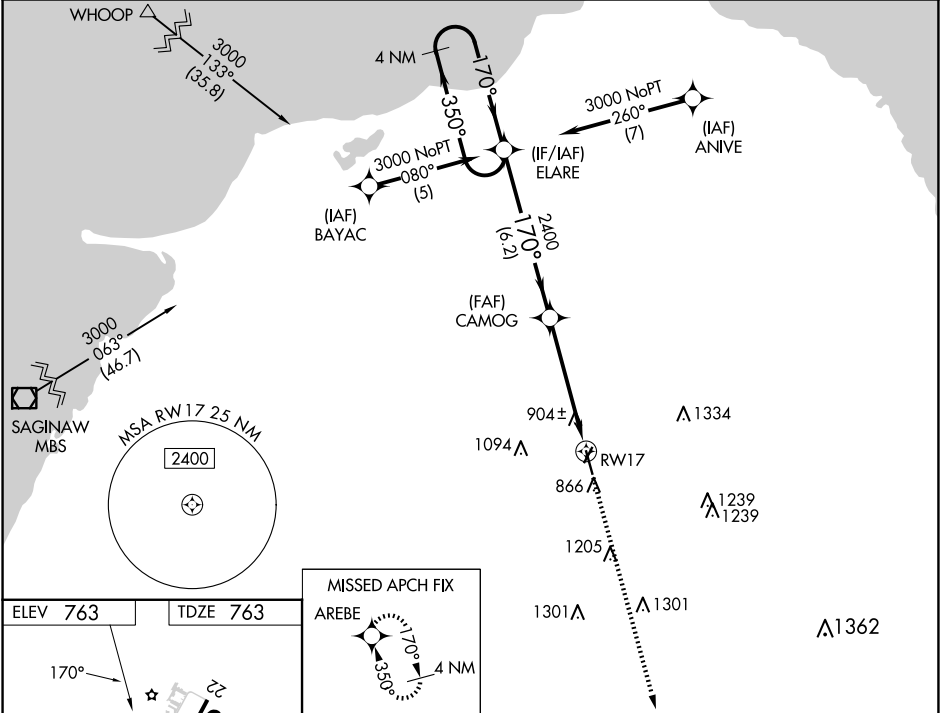

REIL Rws 17 and 35 1

MIRL Rws 4-22 and 17-35 1

4 NM Holding Pattern ELARE

3000 350° 170° GP 3.00° TCH 40

CAMOG 2400

RW17 2400

6.2 NM 4.9 NM

CATEGORY	A	B	C	D
LPV DA	1075-1	312 (400-1)		NA
LNAV/VNAV DA	1352-2	589 (600-2)		NA
LNAV MDA	1220-1	457 (500-1)	1220-1¼ 457 (500-1¼)	NA