

LOC I-FXE
111.1

APP CRS
091°

Rwy Idg **6002**
TDZE **13**
Apt Elev **13**


ILS or LOC RWY 9
FORT LAUDERDALE EXEC (FXE)

When local altimeter setting not received, use FLL altimeter setting: increase S-ILS 9 DA to 231 feet; increase all MDAs 20 feet.

MALSR

MISSED APPROACH: Climb to 1000 then climbing left turn to 2100 on heading 285° and on VKZ VOR/DME R-348 to SHANC INT/VKZ 35 DME and hold.

ATIS 119.85	MIAMI APP CON 119.7 306.3	EXECUTIVE TOWER 120.9 239.3	GND CON 121.75	CLNC DEL 127.95
-----------------------	-------------------------------------	---------------------------------------	--------------------------	---------------------------

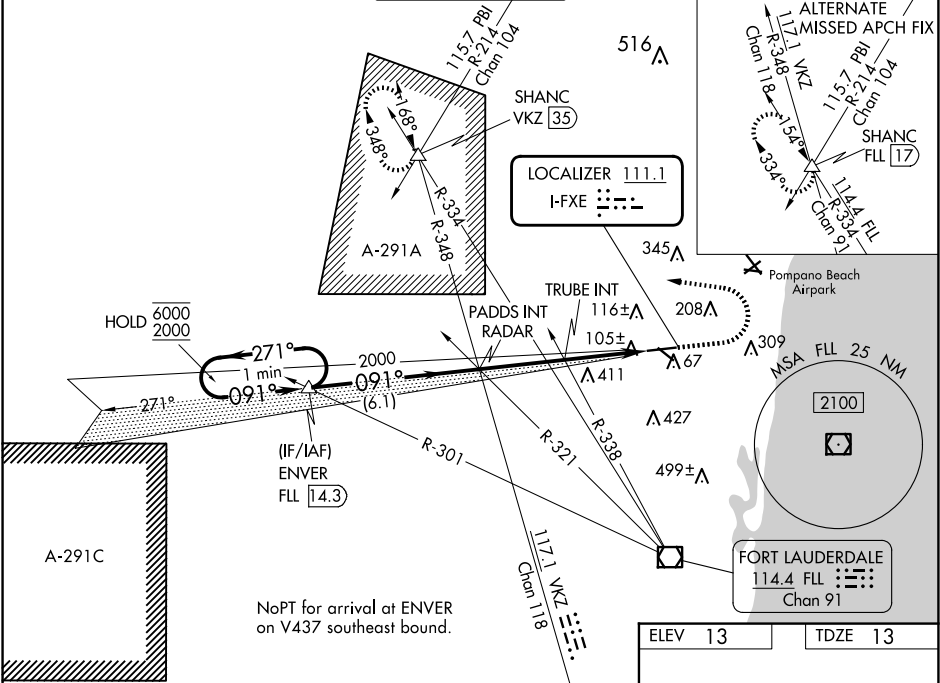

*500 when using FLL altimeter setting.

One Minute Holding Pattern

6000 2000 271° 091°

GS 3.00° TCH 55

ENVER FLL 14.3

PADDs INT RADAR 2000

TRUBE INT

480

6.1 NM 3.1 NM 3 NM

1000 2100 VKZ R-348 SHANC

↑ hdg 285°

6002 x 100 27

4000 x 100 51

TWR 75

091°

CATEGORY	A	B	C	D
S-ILS 9	213-½	200 (200-½)		
S-LOC 9*	480-½ 467 (500-½)	480-1 467 (500-1)		
CIRCLING	520-1 507 (600-1)	620-1 607 (700-1)	780-2¼ 767 (800-2¼)	780-2½ 767 (800-2½)
TRUBE FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)				
S-LOC 9	360-½ 347 (400-½)	360-¾ 347 (400-¾)		
CIRCLING	520-1 507 (600-1)	620-1 607 (700-1)	780-2¼ 767 (800-2¼)	780-2½ 767 (800-2½)

FORT LAUDERDALE, FLORIDA

Amdt 5B 17APR25

26°12'N-80°10'W

FORT LAUDERDALE EXEC (FXE)

ILS or LOC RWY 9

SE-3, 04 SEP 2025 to 02 OCT 2025

SE-3, 04 SEP 2025 to 02 OCT 2025