

WAAS CH 7072A W23A	APP CRS 230°	Rwy Idg TDZE 464 Apt Elev 468	6011 464 468
--	------------------------	---	---

RNAV (GPS) RWY 23
JIMMY CARTER RGNL (ACJ)


RNP APCH-GPS.

NA Baro-VNAV NA and VDP NA when using Columbus altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 41°C. For inop ALS when using Columbus altimeter setting, increase LPV and LNAV/VNAV all Cats visibility to 1 ½ SM. Rwy 23 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Columbus altimeter setting and increase LPV DA to 876 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 881 feet and all visibilities ¼ SM; increase all MDAs 120 feet and LNAV visibility Cats C/D ¾ SM, and Circling visibility Cat C ½ SM and Cat D ¼ SM. For inop ALS, increase LPV and LNAV/VNAV all Cats visibility to ¾ SM. Circling Rwy 10, 28 NA at night.

MAISF

MISSED APPROACH:
Climb to 2600 direct JIMOP and hold.

AWOS-3 128.375	ATLANTA APP CON ★ 124.2 323.1	CLNC DEL 119.95	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------	---------------------------------

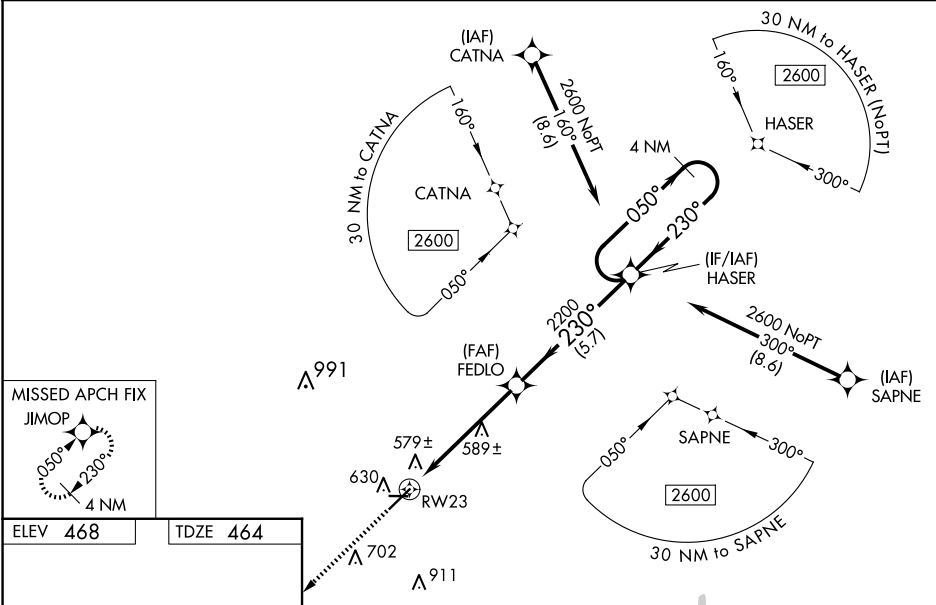

230°

10

3786 X 75

28

6011 X 100

5

REIL Rwy 23

HIRL Rwy 5-23

2600

↑

JIMOP

✦

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00°/TCH 59°).

4 NM Holding Pattern

*LNAV only.

*1 NM to RW23

RW23

FEDLO

2200

HASER

050°

2600

230°

GP 3.00°
TCH 45

1 NM

4.3 NM

5.7 NM

CATEGORY	A	B	C	D
LPV DA	760-¾		296 (300-¾)	
LNAV/VNAV DA	765-¾		301 (300-¾)	
LNAV MDA	840-¾	376 (400-¾)	840-¾	376 (400-¾)
CIRCLING	940-1	472 (500-1)	1020-1½ 552 (600-1½)	1280-2¾ 812 (900-2¾)

SE-4, 04 SEP 2025 to 02 OCT 2025

SE-4, 04 SEP 2025 to 02 OCT 2025